

RVS SERIES

Relief Valve




Features

- For low pressure service.
- Direct acting, spring loaded.
- It will open when system pressure reaches the set level.
- 100% factory tested, for proper set and resealing performance.

Technical Data

Body Material	316 Stainless steel
Cracking Pressure	217 psig (15 bar) / 870 psig (60 bar)
Inlet Port	1/4"NPT Male
Outlet Port	1/4"NPT Female
Seal	Viton (standard)

Dimension (mm)

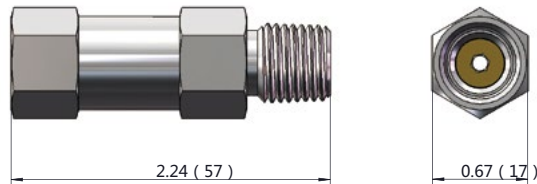

Dimension drawings shown are for reference only.

Ordering Information

RVS	S	M	F	4	15
BASIC SERIES	MATERIAL	INLET CONNECTION	OUTLET CONNECTION	SIZE	CRACKING PRESSURE
RVS	S - 316 Stainless steel	M-Male NPT	F-Female NPT	4-1/4 in.	15 0-217psig (0-15 bar) 60 217-870psig (15-60 bar)