

USB Thermocouple Probe

Rometec srl - www.rometec.it - info@rometec.it - Rometec srl - www.rometec.it - info@rometec.it

With Free Recording and Logging Software

TJ-USB Series



Optional

- ✓ Connects Directly to a USB Port on Your Computer
- ✓ Free TRH Central Software Available for Download from OMEGA Converts Your PC into a Temperature Meter, Data Logger or Chart Recorder
- ✓ Available "Off-the-Shelf" in Two Different Measurement Ranges
- ✓ 457 and 610 mm (18 and 24") Probe Lengths Standard
- ✓ Available in 4.5 or 6 mm ($\frac{3}{16}$ or $\frac{1}{4}$ ") Diameter 304 SS, Inconel® and High Performance Super OMEGACLAD® XL Sheaths


OMEGA's TJ-USB Series of thermocouple probes with direct USB connection feature a rugged transition joint construction, 2 m (6') of shielded output cable and free user software that converts your PC into a temperature meter, chart recorder or data logger. Probes are available off-the-shelf in 18 or 24" lengths and with 0.187 or 0.250" 304 stainless steel, Inconel® or high performance Super OMEGACLAD® XL sheathing.

Relative Humidity Probe with USB Connection Available



TJ-USB-CASS-316-18-K1 shown smaller than actual size.

Laptop not included.

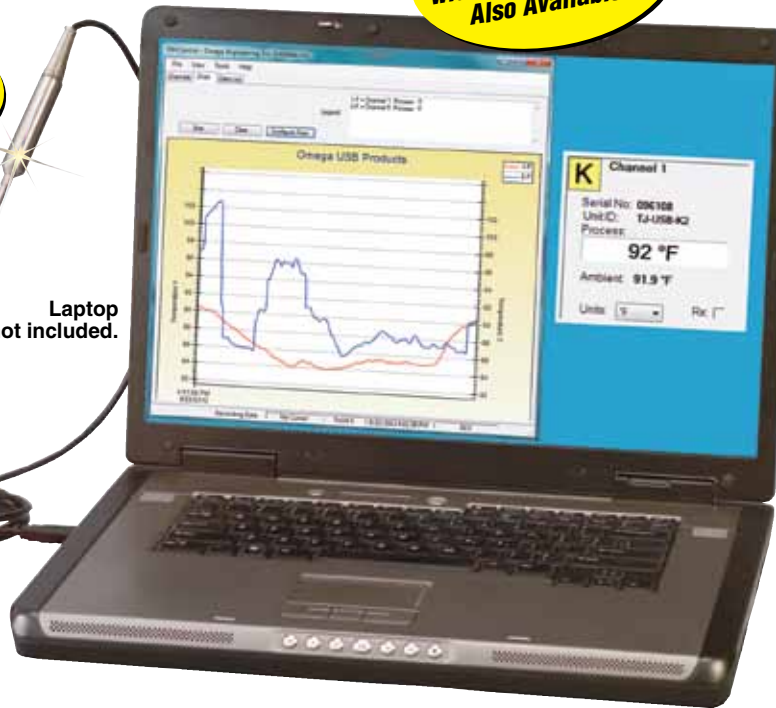

Infrared Probe with USB Connection Also Available

Specifications

Integral Thermocouple: Type K (ungrounded)

Measurement Range:

K1: -73 to 315°C (-100 to 600°F)

K2: -200 to 1000°C (-328 to 1832°F)

Note: For 304 stainless steel max temperature is 850°C (1562°F)

Accuracy:

K1: ±1°C (1.8°F)

K2: ±3°C (5.4°F)

Resolution:

K1: 0.1°

K2: 1°

Stability:

K1: ±0.25°C

K2: ±0.5°

Cold Junction Compensation (Automatic): -10 to 70°C

Operating Environment (Cold End): -10 to 70°C, 0 to 95% relative humidity (non-condensing)

PC Interface: USB

USB Cable: Integral to probe, 2 m (6') (shielded) Type A plug

Software (Free Download from OMEGA): Requires Windows® 2000, XP, VISTA (32-bit) or Windows 7 (32-bit)

Weight: 70 g (2.5 oz)

To Order

| Model No. | Description |
|-------------------------|--|
| TJ-USB-CASS-(*)-(**)-K1 | 304 SS transition joint probe -73 to 315°C (-100 to 600°F) |
| TJ-USB-CASS-(*)-(**)-K2 | 304 SS transition joint probe -200 to 850°C (-328 to 1562°F) |
| TJ-USB-CAIN-(*)-(**)-K1 | Inconel transition joint probe -73 to 315°C (-100 to 600°F) |
| TJ-USB-CAIN-(*)-(**)-K2 | Inconel transition joint probe -200 to 1000°C (-328 to 1832°F) |
| TJ-USB-KQXL-(*)-(**)-K1 | Nickel-chrome transition joint probe -73 to 315°C (-100 to 600°F) |
| TJ-USB-KQXL-(*)-(**)-K2 | Nickel-chrome transition joint probe -200 to 1000°C (-328 to 1832°F) |
| RH-USB | Humidity/temperature probe with USB |
| HX70-MKIT | Wall/duct mounting kit for RH-USB |
| CAL-3 | NIST traceable calibration with 3 data points |

*Insert "316" for 4.5 mm (0.187" diameter sheath) or "14" for 6 mm (0.250" diameter sheath).

**Insert "18" for 457 mm (18" probe length) or "24" for 610 mm (24" probe length).

Ordering Examples: TJ-USB-CASS-14-24-K1, heavy-duty USB TJ probe, 304 SS sheath, 6 mm ($\frac{1}{4}$ ") OD, 610 mm (24") long with integral USB cable and Type A connector, -73 to 315°C (-100 to 600°F) temperature range.

TJ-USB-KQXL-316-18-K2, heavy-duty USB TJ probe, Nickel-Chrome sheath, 4.5 mm ($\frac{3}{16}$ ") OD, 457 mm (18") L with integral USB cable and Type A connector, -200 to 1000°C (-328 to 1832°F) temperature range.

Rometec srl - www.rometec.it - info@rometec.it - Rometec srl - www.rometec.it - info@rometec.it