



## Features


- Slim - dimensions of W21 x L16 x H54.4 mm (excluding mounting parts and barbs) while still providing a 2 mm orifice diameter.
- Both IN and OUT ports are rated up to 200 kPa for the 2-way and the 3-way models.
- Less pumping volume than conventional direct acting diaphragm valves.
- Improved cost compared to our conventional valves, due to economical procurement.

## Specifications

Model Number	WEG-2R-N1E	WEG-3R-N1E
Type	2-way N.C.	3-way
Orifice Diameter	2 mm	
Operating Pressure Range	IN, OUT: -90 ~ 200 kPa	
Port Connection	Hose Barb	
Fluid Temp. Range	5 ~ 50 °C	
Ambient Temp. Range	5 ~ 50 °C	
Rated Voltage	12 VDC, 24 VDC	
Power Consumption	2.6 W	
Duty Cycle	Continuous	
Insulation Class	Class E	
Wetted Materials	PPS, EPDM (Optionally FPM)	

## Dimensions

(Same dimensions for both 2-way and 3-way)

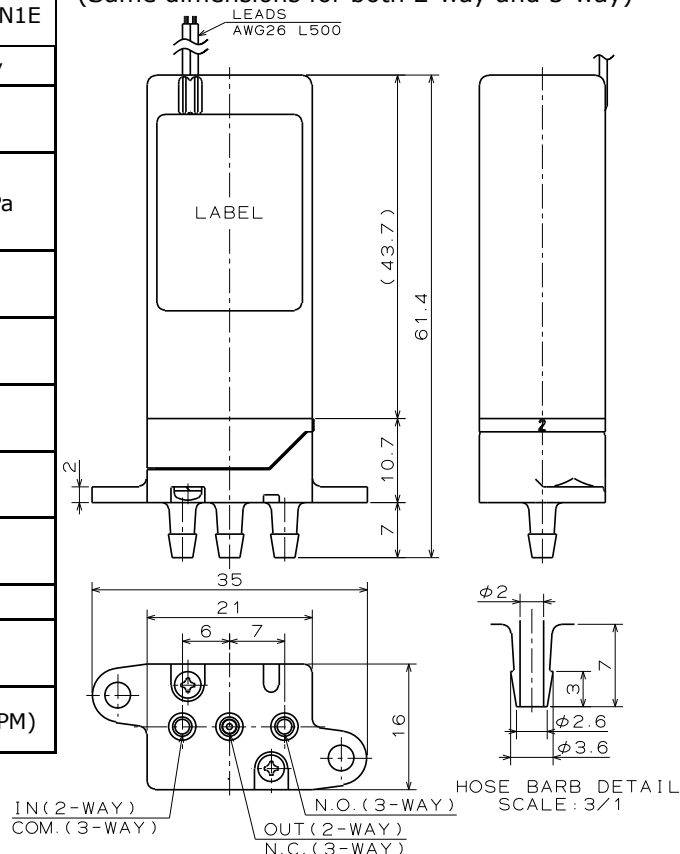

Note: Details including specifications may change without notification.

TAKASAGO ELECTRIC, INC.

66 KAKITSUBATA NABUMI-CHO, MIDORI-KU, NAGOYA 458-8592 JAPAN  
TEL: 01 92 091 2501 FAX: 01 92 091 1500

E-mail: [info@takasago-elec.co.jp](mailto:info@takasago-elec.co.jp) URL: <http://www.takasago-fluidics.com/>