










# Mechanical pressure monitoring

	PST4B 9B4	PST4K 9K4	PST4M 9M4	PSTD 9D0	P/PS 900/904/912	PV/PVF 903/907/915/940/941/942	
	Seite 16	Seite 22	Seite 27	Seite 32	Seite 37	Seite 43	
							
<b>Measuring principle</b>	Bellow	Piston	Membrane	Bellow	Bellow	Bellow	
<b>Measuring range</b>	-0.6 ... 3.4 to 4 ... 40 bar -8 ... 45 to 60 ... 500 psi	1 ... 10 to 40 ... 400 bar 14 ... 150 to 580 ... 5800 psi	1 ... 10 to 10 ... 100 bar 14 ... 150 to 150 ... 1500 psi	-1 ... 6 and -1 ... 8 bar	-0.9 ... 1.5 to 10 ... 100 bar 5 ... 50 to 125 ... 1500 psi	-0.9 ... 1.5 to 4 ... 40 bar 5 ... 50 to 50 ... 500 psi	
<b>Output signal</b>	1 Floating change-over contact (SPDT)	1 Floating change-over contact (SPDT)	1 Floating change-over contact (SPDT)	1 Floating change-over contact (SPDT)	1 Floating change-over contact (SPDT)	1 Floating change-over contact (SPDT)	
<b>Pressure connections</b>	G1/8" f, G1/4" f, M10x1.0 f, G1/4" m	G1/8" f, G1/4" f, M10x1.0 f	G1/8" f, G1/4" f, M10x1.0 f	G1/4" f	G1/4" f, G1/2" m, 1/4" NPT f	G1/4" f, G1/2" m, 1/4" NPT f	
<b>Electrical connections</b>	EN175301-803-A (DIN43650-A)	EN175301-803-A (DIN43650-A)	EN175301-803-A (DIN43650-A)	EN175301-803-A (DIN43650-A)	Screw terminal	Screw terminal	
<b>Switching differential</b>	Not adjustable	Not adjustable	Not adjustable	Not adjustable	Not adjustable	Adjustable	
<b>Media temperature</b>	-25°C ... +125°C -40°C ... +125°C	-25°C ... +125°C	0°C ... +80°C	-25°C ... +120°C	-40°C ... +150°C	-40°C ... +150°C	
<b>Ambient temperature</b>	-25°C ... +85°C -40°C ... +85°C	-25°C ... +85°C	0°C ... +80°C	-25°C ... +85°C	-25°C ... +70°C	-25°C ... +70°C	
<b>Protection</b>	IP65	IP65	IP65	IP65	IP65	IP65	
<b>Housing / pressure connection</b>	Aluminium EN AW-6026 AlMgSiPb0.4 anodized	Aluminium EN AW-6026 AlMgSiPb0.4 anodized	Aluminium EN AW-6082 AlMgSi1 anodized	Brass CuZn39Pb3	AlSi10Mg/ Epoxy coated	AlSi10Mg/ Epoxy coated	
<b>Sealing</b>	HNBR 75 Sh, FPM, EPDM	PTFE	FKM	-	NBR	NBR	
<b>Applications</b>	Shipbuilding Engine manufacturing Railways Machine tools	Shipbuilding Engine manufacturing Railways Machine tools Hydraulics	Shipbuilding Engine manufacturing Railways Machine tools Hydraulics	Shipbuilding Engine manufacturing Machine tools Hydraulics	Shipbuilding Engine manufacturing Railways Machine tools Hydraulics	Shipbuilding Engine manufacturing Railways Machine tools Hydraulics	
<b>Approval / conformity</b>	ABS, BV, CCS, DNV-GL, KRS, LR, NKK, RINA, RMRS EN60730-1/ EN60730-2-6: Type 2.B.H	ABS, BV, CCS, DNV-GL, KRS, LRS, RINA, EN60730-1/ EN60730-2-6: Type 2.B.H	ABS, BV, CCS, DNV-GL, KRS, LRS, RINA, EN60730-1/ EN60730-2-6: Type 2.B.H	DNV-GL EN60730-1/ EN60730-2-6: Type 2.B.H	ABS, BV, CCS, DNV-GL, KRS, LRS, RINA EN60730-1/ EN60730-2-6: Type 2.B.H	ABS, BV, CCS, DNV-GL, KRS, LRS, RINA EN60730-1/ EN60730-2-6: Type 2.B.H	
<b>Type of protection</b>							
<b>Data sheet</b>	/H72367	/H72369	/H72368	/H72273	/H72252	/H72257	
<b>Instructions</b>	/H73367	/H73367	/H73367	/H73273	/H71261	/H71261	

PK 944/947	PD 920/924/932	901/902/905/906	987/988	EXP 900/904/912	EXPK 944/947/953	EXPD 920/924/932
Seite 49	Seite 55		Seite 61	Seite 66	Seite 71	Seite 77
						
Piston	Bellow	Membrane	Bellow	Bellow	Piston	Bellow
1 ... 10 to 60 ... 600 bar	-1 ... 6 to -1 ... 18 bar	30 ... 600 and 50 ... 1000 mbar	-0.3 ... 1.3 to 1 ... 10 bar	-0.9 ... 1.5 to 4 ... 40 bar	1 ... 10 to 60 ... 600 bar	-1 ... 6 to -1 ... 18 bar
1 Floating change-over contact (SPDT)	1 Floating change-over contact (SPDT)	1 Floating change-over contact (SPDT)	1 or 2 floating change-over contacts (SPDT)	1 Floating change-over contact (SPDT)	1 Floating change-over contact (SPDT)	1 Floating change-over contact (SPDT)
G1/4" f, G1/2" m	G1/4" f, G1/8" f, G1/2" m	G1/4" f, G1/2" m	G1/4" m	G1/4" f, G1/2" m	G1/4" f, G1/2" m	G1/4" f, G1/8" f, G1/2" m
Screw terminal	Screw terminal	Screw terminal	Blade connector	Screw terminal	Screw terminal	Screw terminal
Not adjustable	Not adjustable	Not adjustable	Not adjustable	Not adjustable	Not adjustable	Not adjustable
NBR: -30°C ... +100°C FKM: -15°C ... +150°C	-40°C ... +150°C	-40°C ... +150°C	-25°C ... +80°C	-40°C ... +150°C	NBR: -30°C ... +100°C FKM: -15°C ... +150°C	-50°C ... +150°C
-20°C ... +70°C	-25°C ... +70°C	-25°C ... +70°C	-25°C ... +70°C	-50°C ... +65°C	-50°C ... +65°C	-50°C ... +65°C
IP65	IP65	IP65	IP40 (Microswitch IP67)	IP66 Accessory 06: IP66	IP66 Accessory 06: IP66	IP66
AlSi10Mg/ Epoxy coated	AlSi10Mg/ Epoxy coated	AlSi10Mg/ Epoxy coated	PBTP, Crastin	AlSi10Mg/ Epoxy coated Accessory 06: 1.4301 (AISI 304)	AlSi10Mg/ Epoxy coated Accessory 06: 1.4301 (AISI 304)	AlSi10Mg/ Epoxy coated
NBR/FKM	NBR	NBR	-	NBR	NBR / FKM	NBR
Shipbuilding Engine manufacturing Railways Machine tools Hydraulics	Shipbuilding Engine manufacturing Railways Machine tools Hydraulics	Engine manufacturing HVAC	Machine tools Medium voltage switchgear	⊕ II 2G / D	⊕ II 2G / D	⊕ II 2G / D
ABS, BV, CCS, DNV-GL, KRS, LRS, RINA EN60730-1/ EN60730-2-6: Type 2.B.H	ABS, BV, CCS, DNV-GL, KRS, LRS, RINA EN60730-1/ EN60730-2-6: Type 2.B.H	EN60730-1/ EN60730-2-6: Typ 2.B.H	EN60730-1/ EN60730-2-6: Type 2.B.H	SEV 15 ATEX 0157 X IECEx SEV 17.0013X	SEV 15 ATEX 0157 X IECEx SEV 17.0013X	SEV 15 ATEX 0157 X IECEx SEV 17.0013X
				Areas with gaz explosion hazards: II 2G Ex db eb IIC T6 Gb Areas with dust explosion hazards: II 2D Ex tb IIIC T80°C Db	Areas with gas explosion hazards: II 2G Ex db eb IIC T6 Gb; Areas with dust explosion hazards: II 2D Ex tb IIIC T80°C Db	Areas with gas explosion hazards: II 2G Ex db eb IIC T6 Gb; Areas with dust explosion hazards: II 2D Ex tb IIIC T80°C Db
/H72259	/H72253	/H72269	/H72272	/H72263	/H72270	/H72256
/H71261	/H73256		/H73272	/H73171	/H73171	/H73171

# PICOSTAT PRESSURE SWITCH

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The 9B4 of the Picostat series is based on our long lasting experience in the shipbuilding and railway sector. This further improved version offers high vibration resistance within a compact body and is suitable for a wide temperature range.



## Applications

- Shipbuilding
- Engine manufacturing
- Railways
- Machine tools









## Features

- Improved vibration resistance
- Compact design
- Rugged housing
- Protection IP65
- Any mounting position possible

Technical Data			
Measuring principle	Bellow	Repeatability	± 0.5 % FS typ.
Measuring range	-0.6 ... 3.4 to 4 ... 40 bar -8 ... 45 to 60 ... 500 psi	Media temperature	Standard: -25°C ... +125°C with sensor 789/790/791: -40°C ... +125°C
Output signal	1 Floating change-over contact (SPDT)	Ambient temperature	Standard: -25°C ... +85°C with sensor 789/790/791: -40°C ... +85°C
Switching differential	Not adjustable	Approval / conformity	ABS, BV, CCS, DNV-GL, KRS, LR, NKK, RINA, RMRS EN60730-1/ EN60730-2-6: Typ 2.B.H

Subject to change

## Ordering information/type code

		9B4 .	XX	XX	XXX	XX	XX	
<b>Microswitch</b>	Standard <sup>1)</sup>		42					
	Standard  <sup>1)</sup>		33					
	Gold plated contacts <sup>1)</sup>		84					
<b>Range</b>	<b>Range [bar]</b>	<b>Over pressure [bar]</b>		<b>Range [psi]</b>	<b>Over pressure [psi]</b>			
	-0.6 ... 3.4	12	<b>74</b>	-8 ... 45	174	<b>G4</b>		
	0 ... 4	12	<b>76</b>	0 ... 50	174	<b>G6</b>		
	0 ... 6	12	<b>77</b>	0 ... 100	174	<b>G7</b>		
	1 ... 10	24	<b>78</b>	14 ... 150	348	<b>G8</b>		
	1 ... 16	24	<b>79</b>	14 ... 250	348	<b>G9</b>		
	2 ... 25	40	<b>80</b>	30 ... 400	580	<b>H0</b>		
	4 ... 40	50	<b>81</b>	60 ... 500	725	<b>H1</b>		
<b>Sensor</b>	<b>Sensor material</b>	<b>Sensor housing material</b>		<b>Range</b>				
	Bronze bellow (CuSn6)  <sup>2)</sup>	Aluminium EN AW-6026 AlMgSiPb0.4 anodized		74		<b>769</b>		
	Bronze bellow (CuSn6)  <sup>2)</sup>	Aluminium EN AW-6026 AlMgSiPb0.4 anodized		76, 77		<b>770</b>		
	Bronze bellow (CuSn6)  <sup>2)</sup>	Aluminium EN AW-6026 AlMgSiPb0.4 anodized		78, 79		<b>771</b>		
	Bronze bellow (CuSn6)  <sup>2)</sup>	Aluminium EN AW-6026 AlMgSiPb0.4 anodized		80, 81		<b>772</b>		
	Bronze bellow (CuSn6)  <sup>3) 4)</sup>	Brass (CuZn39Pb3)		74		<b>789</b>		
	Bronze bellow (CuSn6)  <sup>3) 4)</sup>	Brass (CuZn39Pb3)		76, 77		<b>790</b>		
	Bronze bellow (CuSn6)  <sup>3) 4)</sup>	Brass (CuZn39Pb3)		78, 79		<b>791</b>		
	Bellows stainless steel (1.4404/AISI316L) <sup>4)</sup>	Stainless steel		76, 77		<b>753</b>		
Bellows stainless steel (1.4404/AISI316L) <sup>4)</sup>	Stainless steel		78, 79		<b>754</b>			
<b>Pressure connection</b>	G1/8" female						<b>02</b>	
	G1/4" female						<b>04</b>	
	M10x1 female <sup>5)</sup>						<b>03</b>	
	G1/4" male <sup>5)</sup>						<b>17</b>	
<b>Accessories</b>	Flange with O-Ring <sup>4)</sup>						<b>11</b>	
	Female electrical connector EN 175301-803-A (DIN43650-A)						<b>46</b>	
	Welsh plug G1/4"						<b>74</b>	
	Fixing set						<b>V3</b>	
	Covering cap						<b>15</b>	
	Lead seal (manipulation protection)						<b>16</b>	
	Seal HNBR, -25°C ... +125°C (standard seal) <sup>6)</sup>						<b>83</b>	
	Seal FPM, -18°C ... +125°C <sup>5)</sup>						<b>61</b>	
	Seal EPDM, -40°C ... +125°C <sup>5)</sup>						<b>63</b>	
	Switch point adjustment on customers request Please indicate when ordering: - Switchpoint including measurement unit (kPa, bar, MPa, psi, abs. or rel.) - Increasing or decreasing							<b>88</b>
	Switch point scale							<b>98</b>
	Damping elements and snubber see data sheet H72258							

<sup>1)</sup> Switching differential not adjustable

<sup>2)</sup> Media contacting O-Ring

<sup>3)</sup> O-Ring not media contacting

<sup>4)</sup> Only with pressure connection 04 (G1/4") others upon request

<sup>5)</sup> Upon request

<sup>6)</sup> For pressure connection G1/4" male upon request

## Standard products (extra short lead time)


Product No.	Type Code	Pressure range [bar]	Over pressure max. [bar]	Switching differential [bar]
PST4B3.44	9B4 4274 769 04 0000 0000 15 46 V3	-0.6 ... 3.4	12	0.2 ± 0.1 (fixed)
PST4B64	9B4 4277 770 04 0000 0000 15 46 V3	0 ... 6	12	0.2 ± 0.1 (fixed)
PST4B164	9B4 4279 771 04 0000 0000 15 46 V3	1 ... 16	24	0.4 ± 0.2 (fixed)
PST4B254	9B4 4280 772 04 0000 0000 15 46 V3	2 ... 25	40	1.0 ± 0.6 (fixed)
PST4B404	9B4 4281 772 04 0000 0000 15 46 V3	4 ... 40	50	1.2 ± 0.8 (fixed)
PST4B3.4F4	9B4 4274 769 04 0000 0000 11 15 46 74 V3	-0.6 ... 3.4	12	0.2 ± 0.1 (fixed)
PST4B6F4	9B4 4277 770 04 0000 0000 11 15 46 74 V3	0 ... 6	12	0.2 ± 0.1 (fixed)
PST4B16F4	9B4 4279 771 04 0000 0000 11 15 46 74 V3	1 ... 16	24	0.4 ± 0.2 (fixed)
PST4B25F4	9B4 4280 772 04 0000 0000 11 15 46 74 V3	2 ... 25	40	1.0 ± 0.6 (fixed)
PST4B40F4	9B4 4281 772 04 0000 0000 11 15 46 74 V3	4 ... 40	50	1.2 ± 0.8 (fixed)
PST4B6S4	9B4 4277 753 04 0000 0000 15 46 V3	0 ... 6	12	0.2 ± 0.1 (fixed)
PST4B16S4	9B4 4279 754 04 0000 0000 15 46 V3	1 ... 16	24	0.4 ± 0.2 (fixed)

Specifications		
<b>Accuracy</b>	Repeatability	± 0.5 % FS typ.
	Switching differential	See table
	Adjustment range switchpoint <sup>2)</sup>	10 % ... 90 % FS
	Temperature dependence switching point	-25°C ... +125°C: ca. -0.1% FS/°C typ. < -25°C: ca. -0.25% FS/°C typ.
<b>Environmental conditions</b>	Ambient temperature	Standard: -25°C ... +85°C with sensor 789/790/791: -40°C ... +85°C
	Media temperature	Standard: -25°C ... +125°C with sensor 789/790/791: -40°C ... +125°C
	Storage temperature	Standard: -30°C ... +125°C with sensor 789/790/791: -45°C ... +125°C
	Protection <sup>1)</sup>	IP65
	Humidity	Max. 95 % relative
	Vibration	Switch: IEC/EN 60068-2-6 10...59 Hz: ±0.75 mm Ampl. 59...500 Hz: 5 g
	Shock	50 g / 3 ms
<b>Mechanical Data</b>	Sensor	See ordering information
	Housing	Aluminium EN AW-6026 AlMgSiPb0.4 anodized
	Sealing	HNBR 75 Sh, FPM, EPDM
	Housing seal	EPDM 75 Sh
	Male electrical plug	Polyamide (PA)
	Mounting torque	G 1/4": M <sub>A</sub> = 32 ... 40 Nm
	Installation	any position
	Weight	~ 160 g
<b>Microswitch</b>	Rating	See table
	Resistance of insulation	500 VDC > 10 MΩ
	Dielectric strength	> 1.5 kV AC/60 s terminal ground > 500 VAC/60 s via open contacts
<b>Electrical connection</b>	Electrical connections	EN175301-803-A (DIN43650-A)
	Female electrical connector	Cable-Ø: 4 ... 9 mm Terminal screw: 4 x 0.5...1.5 mm <sup>2</sup>


<sup>1)</sup> Provided female connector is mounted according to instructions

<sup>2)</sup> Other adjustment ranges upon request


## Dimensions

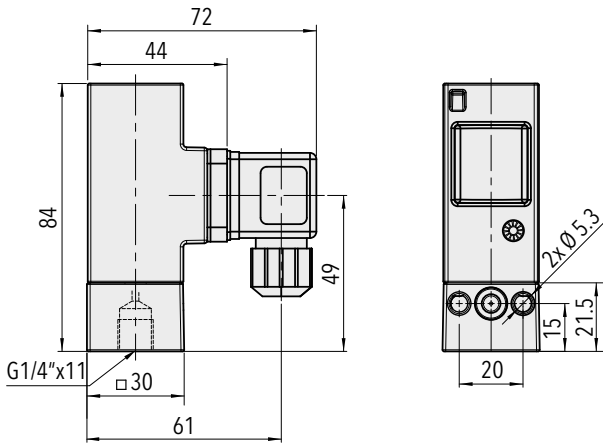

9B4.XXXX.7XX.04.46.V3

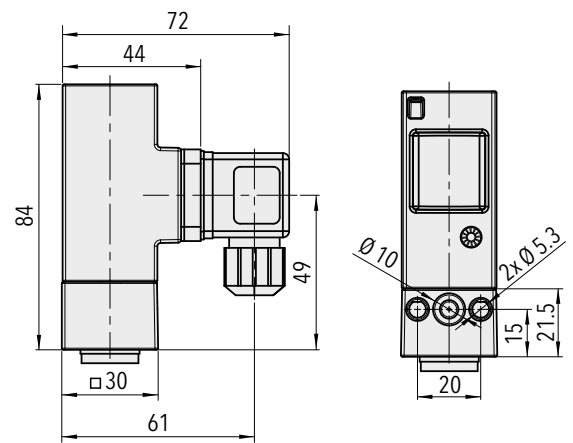


9B4.XXXX.7XX.04.11.46.74.V3

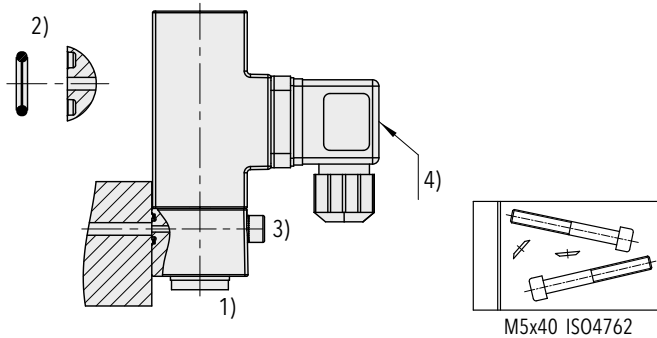


9B4.XXXX.XXX.XX.11

9B4.XXXX.XXX.XX.V3

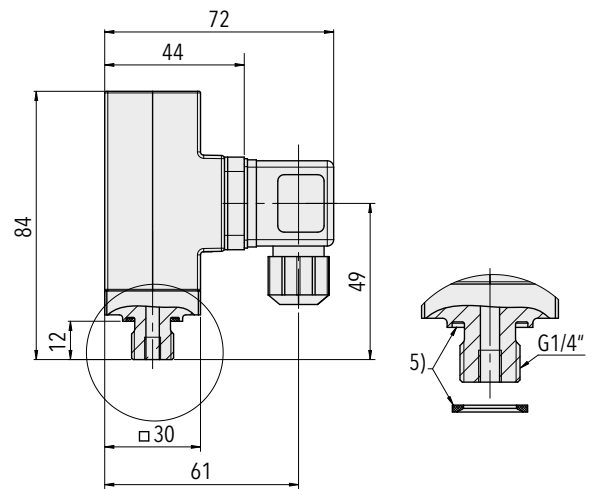


9B4.XXXX.7XX.17.XX


- 1) Torque: G 1/4":  $M_A = 32 \dots 40 \text{ Nm}$
- 2) O-Ring:  $\varnothing 6.75 \times 1.78 \text{ NBR 90 Sh}$
- 3) Fixing screw: M5; property class: 8.8; torque:  $4.5 \dots 6 \text{ Nm}$
- 4) Torque connector center screw: max.  $0.4 \text{ Nm}$
- 5) Seal: see accessories

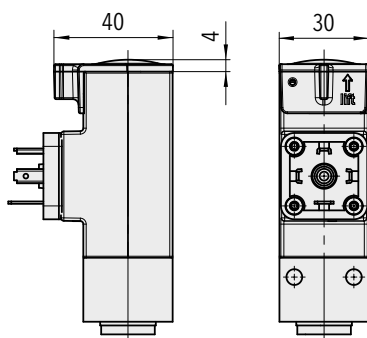

9B4.XXXX.XXX.XX.15



9B4.XXXX.XXX.XX.98



Diagnostic Valve Bloc (DVB)  
see specification sheet H72361



## Switching differential typ. @ 25°C

<b>Measuring range</b>	<b>[bar]</b>	-0.6 ... 3.4	0 ... 4	0 ... 6	1 ... 10	1 ... 16	2 ... 25	4 ... 40
<b>bellows sensor</b>	<b>[psi]</b>	-8 ... 45	0 ... 50	0 ... 100	14 ... 150	14 ... 250	30 ... 400	60 ... 500
<b>Microswitch 42/84/33:</b>	<b>[bar]</b>	0.2 ± 0.1	0.2 ± 0.1	0.2 ± 0.1	0.4 ± 0.2	0.4 ± 0.2	1.0 ± 0.6	1.2 ± 0.8
Switching differential not adjustable	<b>[psi]</b>	4.5	4.5	4.5	9	9	22	26

## Electrical data switch

Type	Features	Rating	
		Resistive Load (Inductive Load)	
		AC	DC
<b>42/33</b> (Standard)	Silver contacts	250 V, 6 (1) A	220 V, 0.25 (0.1) A 110 V, 0.5 (0.2) A 60 V, 1(0.5) A 24 V, 3 (2) A 12 V, 6 (6) A
<b>84</b>	Gold plated contacts, suitable for intrinsically safe control circuits	max. 30 V, 0.1 (0.1) A min. 5 V, 5 mA	

## Electrical connection



EN175301-803-A

## Additional information

Documents		
	Data sheet	/H72367
	Instructions	/H73367
	Flyer	/H70655



# PICOSTAT PRESSURE SWITCH

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The 9K4 of the Picostat series is based on our long lasting experience in the shipbuilding and railway sector. This further improved version offers high vibration resistance within a compact body and is suitable for a wide temperature range.



## Applications

- Shipbuilding
- Engine manufacturing
- Railways
- Machine tools
- Hydraulics


## Features

- Compact design
- Rugged housing
- Protection IP65 (with plug connector)
- Any mounting position possible

Technical Data			
Measuring principle	Piston	Repeatability	± 1.0 % FS typ.
Measuring range	1 ... 10 to 40 ... 400 bar 14 ... 150 to 580 ... 5800 psi	Media temperature	-25°C ... +125°C
Output signal	1 Floating change-over contact (SPDT)	Ambient temperature	-25°C ... +85°C
Switching differential	Not adjustable	Approval / conformity	ABS, BV, CCS, DNV-GL, KRS, LRS, RINA, EN60730-1/ EN60730-2-6: Typ 2.B.H

Subject to change

## Ordering information/type code

				9K4 .	XX	XX	XXX	XX	XX
<b>Microswitch</b>	Standard <sup>1)</sup>				42				
	Standard  <sup>1)</sup>				33				
	Gold plated contacts <sup>1)</sup>				84				
<b>Range</b>	<b>Range [bar]</b>	<b>Over pressure [bar]</b>		<b>Range [psi]</b>	<b>Over pressure [psi]</b>				
	1 ... 10	100	<b>78</b>	14 ... 150	1450		<b>G8</b>		
	1 ... 16	100	<b>79</b>	14 ... 250	1450		<b>G9</b>		
	2 ... 25	100	<b>80</b>	30 ... 400	1450		<b>H0</b>		
	4 ... 40	100	<b>81</b>	60 ... 500	1450		<b>H1</b>		
	6 ... 60	200	<b>82</b>	85 ... 850	2900		<b>H2</b>		
	10 ... 100	200	<b>83</b>	150 ... 1500	2900		<b>H3</b>		
	16 ... 160	400	<b>84</b>	250 ... 2500	5800		<b>H4</b>		
	25 ... 250	400	<b>85</b>	350 ... 3500	5800		<b>H5</b>		
40 ... 400	600	<b>86</b>	580 ... 5800	8700		<b>H6</b>			
<b>Sensor</b>	<b>Sensor material</b>	<b>Sensor housing material</b>		<b>Range</b>					
	Piston 1.4035, sealing PTFE <sup>2)</sup>	Aluminium EN AW-6026 AlMgSiPb0.4 anodized		78, 79			<b>756</b>		
	Piston 1.4035, sealing PTFE <sup>2)</sup>	Aluminium EN AW-6026 AlMgSiPb0.4 anodized		80, 81			<b>757</b>		
	Piston 1.4035, sealing PTFE	Aluminium EN AW-6026 AlMgSiPb0.4 anodized		82, 83			<b>758</b>		
Piston 1.4035, sealing PTFE	Aluminium EN AW-6026 AlMgSiPb0.4 anodized		84, 85, 86			<b>759</b>			
<b>Pressure connection</b>	G1/8" female								<b>02</b>
	G1/4" female								<b>04</b>
	M10x1 female <sup>2)</sup>								<b>03</b>
<b>Accessories</b>	Flange with O-Ring <sup>3)</sup>								<b>11</b>
	Female electrical connector EN 175301-803-A (DIN43650-A)								<b>46</b>
	Welsh plug G1/4"								<b>74</b>
	Fixing set								<b>V3</b>
	Covering cap								<b>15</b>
	Lead seal (manipulation protection)								<b>16</b>
	Switch point adjustment on customers request								
	Please indicate when ordering:								
	- Switchpoint including measurement unit (kPa, bar, MPa, psi, abs. or rel.)								<b>88</b>
	- Increasing or decreasing								
Damping elements and snubber see data sheet H72258									

<sup>1)</sup> Switching differential not adjustable

<sup>2)</sup> Please ask us

<sup>3)</sup> Only with pressure connection 04 (G1/4"), others upon request

## Standard products (extra short lead time)


Product No.	Type Code	Pressure range [bar]	Over pressure max. [bar]	Switching differential [bar]
PST4K164	9K4 4279 756 04 0000 0000 15 46 V3	1 ... 16	100	0.4 ... 2.4 (fixed)
PST4K404	9K4 4281 757 04 0000 0000 15 46 V3	4 ... 40	100	1 ... 6 (fixed)
PST4K1004	9K4 4283 758 04 0000 0000 15 46 V3	10 ... 100	200	5 ... 15 (fixed)
PST4K2504	9K4 4285 759 04 0000 0000 15 46 V3	25 ... 250	400	12 ... 40 (fixed)
PST4K4004	9K4 4286 759 04 0000 0000 15 46 V3	40 ... 400	600	15 ... 50 (fixed)
PST4K16F4	9K4 4279 756 04 0000 0000 11 15 46 74 V3	1 ... 16	100	0.4 ... 2.4 (fixed)
PST4K40F4	9K4 4281 757 04 0000 0000 11 15 46 74 V3	4 ... 40	100	1 ... 6 (fixed)
PST4K100F4	9K4 4283 758 04 0000 0000 11 15 46 74 V3	10 ... 100	200	5 ... 15 (fixed)
PST4K250F4	9K4 4285 759 04 0000 0000 11 15 46 74 V3	25 ... 250	400	12 ... 40 (fixed)
PST4K400F4	9K4 4286 759 04 0000 0000 11 15 46 74 V3	40 ... 400	600	15 ... 50 (fixed)

Specifications		
<b>Accuracy</b>	Repeatability	± 1.0 % FS typ.
	Switching differential	See table
	Adjustment range switchpoint <sup>2)</sup>	10 % ... 90 % FS
	Temperature dependence switching point	approx. + 0.1% FS/°C typ.
<b>Environmental conditions</b>	Ambient temperature	-25°C ... +85°C
	Media temperature	-25°C ... +125°C
	Storage temperature	-40°C ... +85°C
	Protection <sup>1)</sup>	IP65
	Humidity	Max. 95 % relative
	Vibration	Switch IEC/EN 60068-2-6: 10...59 Hz: ±0.75 mm Ampl. 59...500 Hz: 5 g
	Shock	50 g / 3 ms
<b>Mechanical Data</b>	Sensor	See ordering information
	Housing	Aluminium EN AW-6026 AlMgSiPb0.4 anodized
	Sealing	PTFE
	Housing seal	EPDM 75 Sh
	Male electrical plug	Polyamide (PA)
	Mounting torque	G 1/4": M <sub>A</sub> = 32 ... 40 Nm
	Installation	any position
	Weight	~ 200 g
<b>Microswitch</b>	Rating	See table
	Resistance of insulation	500 VDC > 10 MΩ
	Dielectric strength	(IEC/EN 60730-1) >1.5 kV AC/60 s terminal ground >500 VAC/60 s via open contacts
<b>Electrical connection</b>	Electrical connections	EN175301-803-A (DIN43650-A)
	Female electrical connector	Cable-Ø: 4...9 mm Terminal screw: 4 x 0.5...1.5 mm <sup>2</sup>



<sup>1)</sup> Provided female connector is mounted according to instructions

<sup>2)</sup> Other adjustment ranges upon request



## Dimensions

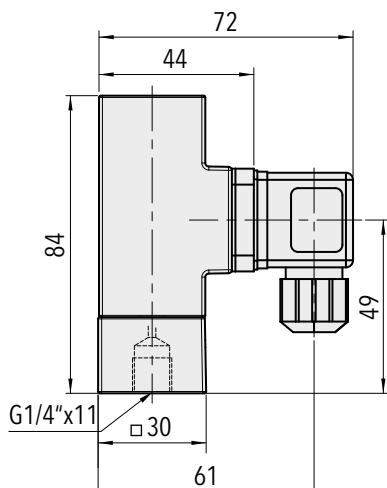


9K4.XXXX.7XX.04.46.V3

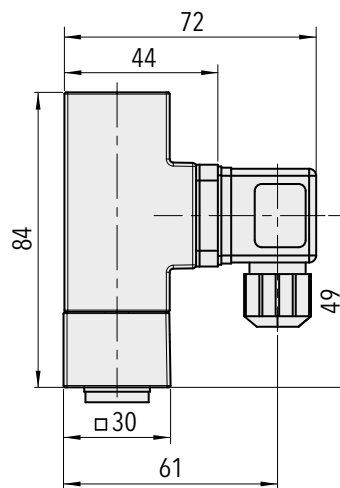


9K4.XXXX.7XX.04.11.46.74.V3

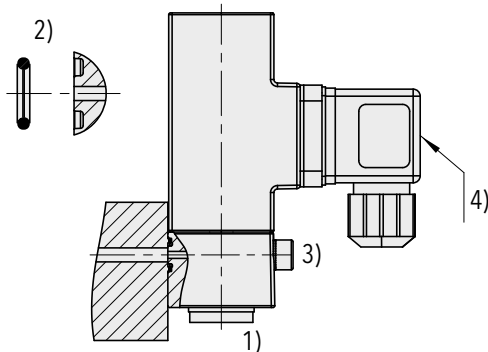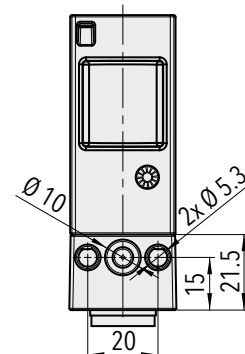

9K4.XXXX.XXX.XX.11




9K4.XXXX.XXX.XX.V3

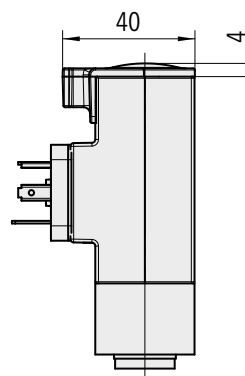

9K4.XXXX.XXX.XX.15

- 1) Torque: G 1/4":  $M_A = 32 \dots 40 \text{ Nm}$
- 2) O-Ring:  $\varnothing 6.75 \times 1.78$  NBR 90 Sh
- 3) Fixing screw: M5; property class: 8.8; torque:  $4.5 \dots 6 \text{ Nm}$
- 4) Torque connector center screw: max.  $0.4 \text{ Nm}$

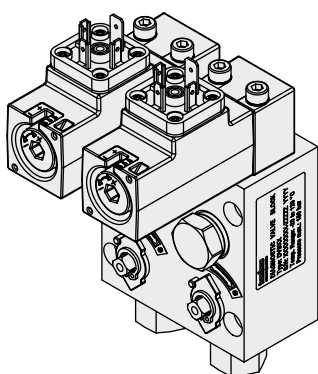

Diagnostic Valve Bloc (DVB)  
see specification sheet H72361



## Switching differential typ. @ 25°C

<b>Measuring range piston sensor</b>	[bar]	1 ... 10	1 ... 16	2 ... 25	4 ... 40	6 ... 60
	[psi]	14 ... 150	14 ... 250	30 ... 400	60 ... 500	85 ... 850
<b>Microswitch 42/84/33:</b> Switching differential not adjustable	[bar]	0.4 ... 2.4	0.4 ... 2.4	1 ... 6	1 ... 6	5 ... 15
	[psi]	6 ... 35	6 ... 35	14.5 ... 88	14.5 ... 88	73 ... 218
<b>Measuring range piston sensor</b>	[bar]	10 ... 100	16 ... 160	25 ... 250	40 ... 400	
	[psi]	150 ... 1500	250 ... 2500	350 ... 3500	580 ... 5800	
<b>Microswitch 42/84/33:</b> Switching differential not adjustable	[bar]	5 ... 15	12 ... 40	12 ... 40	15 ... 50	
	[psi]	73 ... 218	174 ... 580	174 ... 580	218 ... 725	

## Electrical data switch

Type	Features	Rating	
		Resistive Load (Inductive Load)	
		AC	DC
<b>42/33</b> (Standard)	Silver contacts	250 V, 6 (1) A	220 V, 0.25 (0.1) A 110 V, 0.5 (0.2) A 60 V, 1 (0.5) A 24 V, 3 (2) A 12 V, 6 (6) A
<b>84</b>	Gold plated contacts, suitable for intrinsically safe control circuits	max. 30 V, 0.1 (0.1) A min. 5 V, 5 mA	

## Electrical Connection



EN175301-803-A

## Additional information

<b>Documents</b>	Data sheet	/H72369
	Instructions	/H73367
	Flyer	/H70667

# PICOSTAT PRESSURE SWITCH

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The 9M4 of the Picostat series is based on our long lasting experience in the shipbuilding and railway sector. This further improved version offers high vibration resistance within a compact body and is suitable for a wide temperature range.



## Applications

- Shipbuilding
- Engine manufacturing
- Railways
- Machine tools
- Hydraulics


## Features

- Compact design
- Rugged housing
- Protection IP65
- Any mounting position possible

Technical Data			
Measuring principle	Membrane	Repeatability	± 2.0 % FS typ.
Measuring range	1 ... 10 to 10 ... 100 bar 14 ... 150 to 150 ... 1500 psi	Media temperature	0°C ... +80°C
Output signal	1 Floating change-over contact (SPDT)	Ambient temperature	0°C ... +80°C
Switching differential	Not adjustable	Approval / conformity	ABS, BV, CCS, DNV-GL, KRS, LRS, RINA, EN60730-1/ EN60730-2-6: Typ 2.B.H

Subject to change

## Ordering information/type code

				9M4 . XX	XX	XXX	XX	XX
<b>Microswitch</b>	Standard <sup>1)</sup>			42				
	Standard  <sup>1)</sup>			33				
	Gold plated contacts <sup>1)</sup>			84				
<b>Range</b>	<b>Range [bar]</b>	<b>Over pressure [bar]</b>		<b>Range [psi]</b>	<b>Over pressure [psi]</b>			
	1 ... 10	200	<b>78</b>	14 ... 150	2900		<b>G8</b>	
	1 ... 16	200	<b>79</b>	14 ... 250	2900		<b>G9</b>	
	2 ... 25	200	<b>80</b>	30 ... 400	2900		<b>H0</b>	
	4 ... 40	200	<b>81</b>	60 ... 500	2900		<b>H1</b>	
	6 ... 60	200	<b>82</b>	85 ... 850	2900		<b>H2</b>	
	10 ... 100	200	<b>83</b>	150 ... 1500	2900		<b>H3</b>	
<b>Sensor</b>	<b>Sensor material</b>	<b>Sensor housing material</b>		<b>Range</b>				
	FKM Membrane	Aluminium EN AW-6082 AlMgSi1 anodized		78, 79			<b>761</b>	
	FKM Membrane	Aluminium EN AW-6082 AlMgSi1 anodized		80, 81			<b>762</b>	
	FKM Membrane	Aluminium EN AW-6082 AlMgSi1 anodized		82, 83			<b>763</b>	
<b>Pressure connection</b>	G1/8" female							<b>02</b>
	G1/4" female							<b>04</b>
	M10x1 female <sup>2)</sup>							<b>03</b>
<b>Accessories</b>	Flange with O-Ring <sup>3)</sup>							<b>11</b>
	Female electrical connector EN 175301-803-A (DIN43650-A)							<b>46</b>
	Welsh plug G1/4"							<b>74</b>
	Fixing set							<b>V3</b>
	Covering cap							<b>15</b>
	Lead seal (manipulation protection)							<b>16</b>
	Switch point adjustment on customers request							
	Please indicate when ordering: - Switchpoint including measurement unit (kPa, bar, MPa, psi, abs. or rel.) - Increasing or decreasing							
Damping elements and snubber see data sheet H72258								

<sup>1)</sup> Switching differential not adjustable

<sup>2)</sup> Please ask us

<sup>3)</sup> Only with pressure connection 04 (G1/4"), others upon request

## Standard products (extra short lead time)

Product No.	Type Code	Pressure range [bar]	Over pressure max. [bar]	Switching differential [bar]
PST4M164	9M4 4279 761 04 0000 0000 15 46 V3	1 ... 16	200	0.2 ... 1.7 (fixed)
PST4M404	9M4 4281 762 04 0000 0000 15 46 V3	4 ... 40	200	1.2 ... 4.5 (fixed)
PST4M1004	9M4 4283 763 04 0000 0000 15 46 V3	10 ... 100	200	4 ... 16 (fixed)
PST4M16F4	9M4 4279 761 04 0000 0000 11 15 46 74 V3	1 ... 16	200	0.2 ... 1.7 (fixed)
PST4M40F4	9M4 4281 762 04 0000 0000 11 15 46 74 V3	4 ... 40	200	1.2 ... 4.5 (fixed)
PST4M100F4	9M4 4283 763 04 0000 0000 11 15 46 74 V3	10 ... 100	200	4 ... 16 (fixed)


Specifications		
<b>Accuracy</b>	Repeatability	± 2.0 % FS typ.
	Switching differential	See table
	Adjustment range switchpoint <sup>2)</sup>	10 % ... 90 % FS
	Temperature dependence switching point	approx. + 0.1% FS/°C typ.
<b>Environmental conditions</b>	Ambient temperature	0°C ... +80°C
	Media temperature	0°C ... +80°C
	Storage temperature	-40°C ... +85°C
	Protection <sup>1)</sup>	IP65
	Humidity	Max. 95 % relative
	Vibration	Switch IEC/EN 60068-2-6: 10...59 Hz: ±0.75 mm Ampl. 59...500 Hz: 5 g
	Shock	50 g / 3 ms
<b>Mechanical Data</b>	Sensor	See ordering information
	Housing	Aluminium EN AW-6082 AlMgSi1 anodized
	Sealing	FKM
	Housing seal	EPDM 75 Sh
	Male electrical plug	Polyamide (PA)
	Mounting torque	G 1/4": MA= 32 ... 40 Nm
	Installation	any position
	Weight	~ 200 g
<b>Microswitch</b>	Rating	See table
	Resistance of insulation	500 VDC > 10 MΩ
	Dielectric strength	(IEC/EN 60730-1) >1.5 kV AC/60 s terminal ground >500 VAC/60 s via open contacts
<b>Electrical connection</b>	Electrical connections	EN175301-803-A (DIN43650-A)
	Female electrical connector	Cable-Ø: 4...9 mm Terminal screw: 4 x 0.5...1.5 mm <sup>2</sup>

<sup>1)</sup> Provided female connector is mounted according to instructions


<sup>2)</sup> Other adjustment ranges upon request





## Dimensions

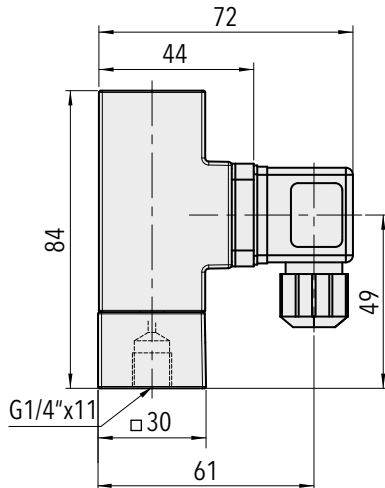


9M4.XXXX.7XX.04.46.V3

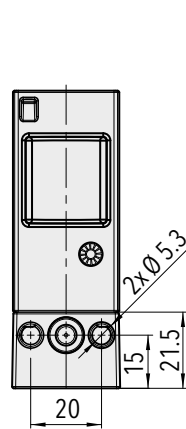


9M4.XXXX.7XX.04.11.46.74.V3

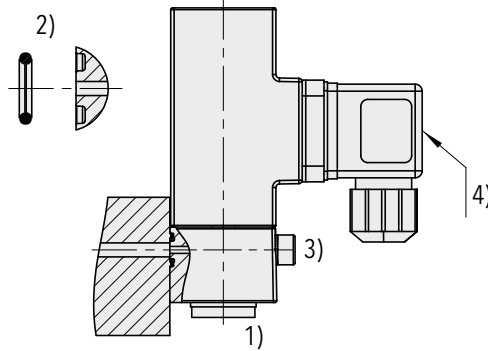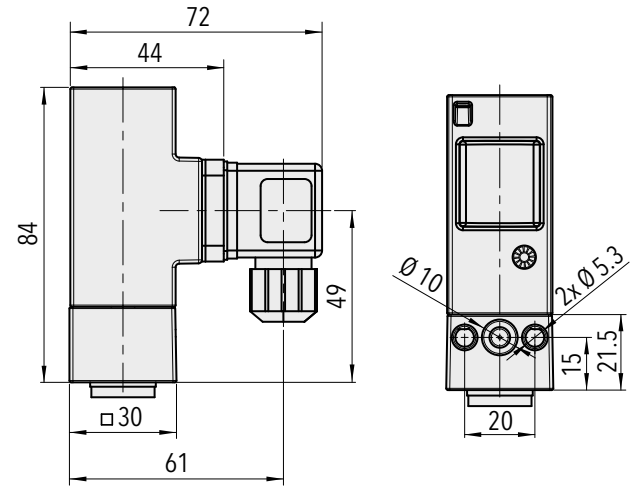


9M4.XXXX.XXX.XX.11




9M4.XXXX.XXX.XX.V3

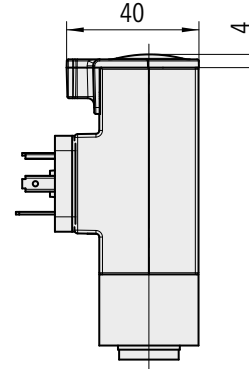

9M4.XXXX.XXX.XX.15



- 1) Torque: G 1/4":  $M_A = 32 \dots 40 \text{ Nm}$
- 2) O-Ring:  $\varnothing 6.75 \times 1.78 \text{ NBR } 90 \text{ Sh}$
- 3) Fixing screw: M5; property class: 8.8; torque:  $4.5 \dots 6 \text{ Nm}$
- 4) Torque connector center screw: max.  $0.4 \text{ Nm}$

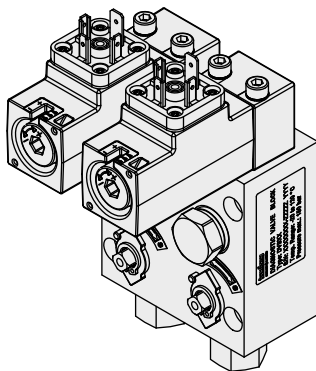

Diagnostic Valve Bloc (DVB)  
see specification sheet H72361



## Switching differential typ. @ 25°C

Measuring range	[bar]	1 ... 10	1 ... 16	2 ... 25	4 ... 40	6 ... 60	10 ... 100
membrane sensor	[psi]	14 ... 150	14 ... 250	30 ... 400	60 ... 500	85 ... 850	150 ... 1500
<b>Microswitch 42/84/33:</b>	[bar]	0.2 ... 1.7	0.2 ... 1.7	1.2 ... 4.5	1.2 ... 4.5	4 ... 16	4 ... 16
Switching differential not adjustable	[psi]	3 ... 24.5	3 ... 24.5	18 ... 66	18 ... 66	58 ... 232	58 ... 232

## Electrical data switch

Type	Features	Rating	
		Resistive Load (Inductive Load)	
		AC	DC
<b>42/33</b> (Standard)	Silver contacts	250 V, 6 (1) A	220 V, 0.25 (0.1) A 110 V, 0.5 (0.2) A 60 V, 1(0.5) A 24 V, 3 (2) A 12 V, 6 (6) A
<b>84</b>	Gold plated contacts, suitable for intrinsically safe control circuits	max. 30 V, 0.1 (0.1) A min. 5 V, 5 mA	

## Electrical Connection



EN175301-803-A

## Additional information

Documents		
	Data sheet	/H72368
	Instructions	/H73367
	Flyer	/H70668

# DIFFERENTIAL PRESSURE PICOSTAT

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature.



## Applications

- Shipbuilding
- Engine manufacturing
- Machine tools
- Hydraulics

## Features

- Compact design
- Rugged housing
- High repeatability
- Protection IP65 (with plug connector)
- Any mounting position possible

Technical Data			
Measuring principle	Bellow	Repeatability	± 1.0 % FS typ.
Measuring range	-1 ... 6 and -1 ... 8 bar	Media temperature	-25°C ... +120°C
Differential pressure	0 ... 4 and 0 ... 6 bar	Ambient temperature	-25°C ... +85°C
Output signal	1 Floating change-over contact (SPDT)	Approval / conformity	GL EN60730-1/ EN60730-2-6: Typ 2.B.H
Switching differential	Not adjustable		

Subject to change

## Ordering information/type code

					9D0 . XX . XX . XXX . XX . XX
<b>Microswitch</b>	Big switching differential <sup>1)</sup>				20
	Small switching differential <sup>1)</sup>				28
	Switch with gold plated contacts <sup>1)</sup>				83
<b>Range</b>	<b>Range [bar]</b>	<b>Differential pressure [bar]</b>	<b>Over pressure [bar]</b>	<b>Burst pressure [bar]</b>	
	-1 ... 6	0 ... 4	8	11.5	76
	-1 ... 8	0 ... 6	12	26	77
<b>Sensor</b>	<b>Sensor material</b>	<b>Sensor housing material</b>		<b>Range</b>	
	Bronze (CuZn6)	Brass (CuZn39Pb3)		76	770
	Bronze (CuZn6)	Brass (CuZn39Pb3)		77	771
<b>Pressure connection</b>	G1/4" female				04
<b>Accessories</b>	Flange with O-Ring				11
	Covering				15
	Lead seal (manipulation protection)				16
	Female electrical connector DIN43650-A				58
	Welsh plug G1/8"				57
	Welsh plug G1/4"				74
	Fixing set				V3
	Damping elements and snubber see data sheet H72258				

<sup>1)</sup> Switching differential not adjustable


## Standard products (extra short lead time)

Product No.	Type Code	Pressure range [bar]	Differential pressure [bar]	Over pressure max. [bar]	Switching differential [bar]
PSTD4	9D0 2076 770 04 0000 0000 15 58 V3	-1 ... 6	0 ... 4	8	0.2 (fixed)
PSTD6	9D0 2077 771 04 0000 0000 15 58 V3	-1 ... 8	0 ... 6	12	0.3 (fixed)


Specifications		
<b>Accuracy</b>	Repeatability	± 1.0 % FS typ.
	Switching differential	See table
	Adjustment range switchpoint <sup>1)</sup>	10% ... 90% FS
<b>Environmental conditions</b>	Ambient temperature	-25°C ... +85°C
	Media temperature	-25°C ... +120°C
	Storage temperature	-40°C ... +85°C
	Protection	IP65
	Humidity	Max. 95 % relative
	Vibration	5...25 Hz: ±1.6 mm 25...100 Hz: 4g
	Shock	50g/ 11ms
<b>Mechanical Data</b>	Sensor	Bronze (CuSn8)
	Housing	Brass CuZn39Pb3
	Sealing	-
	Male electrical plug	Polyamide PA
	Mounting torque	Max. 25 Nm
	Installation	any position
	Weight	~ 800 g
<b>Microswitch</b>	Rating	See table
	Resistance of insulation	> 2 MΩ
	Dielectric strength	1.45 kV terminal ground
	Life time (mechanical)	Microswitch 20: 1 Mio. cycles Microswitch 28/83: 10 Mio. cycles
<b>Electrical connection</b>	Electrical connections	EN175301-803-A (DIN43650-A)
	Female electrical connector	Cable-Ø: 6...13 mm Terminal screw: 4 x 0.5...1.5 mm <sup>2</sup>

<sup>1)</sup> Other adjustment ranges upon request


## Dimensions

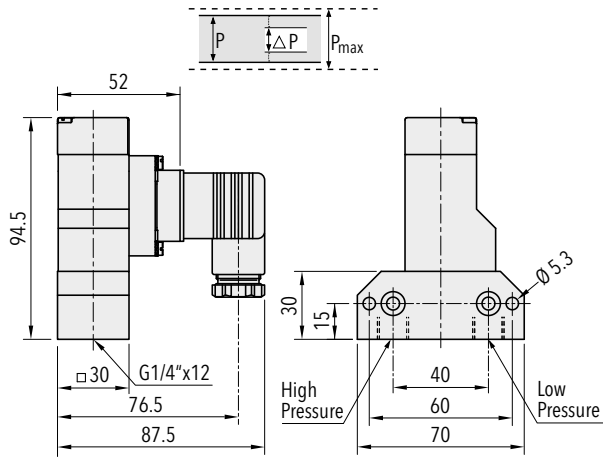

9D0.XX7X.77X.04.58.V3

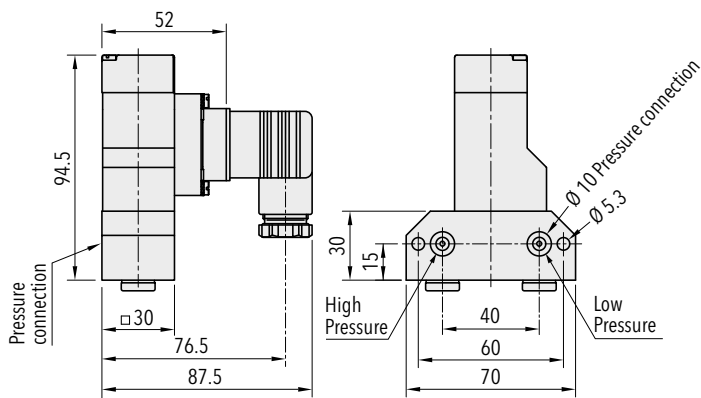

9D0.XX7X.77X.04.11.58.74.V3

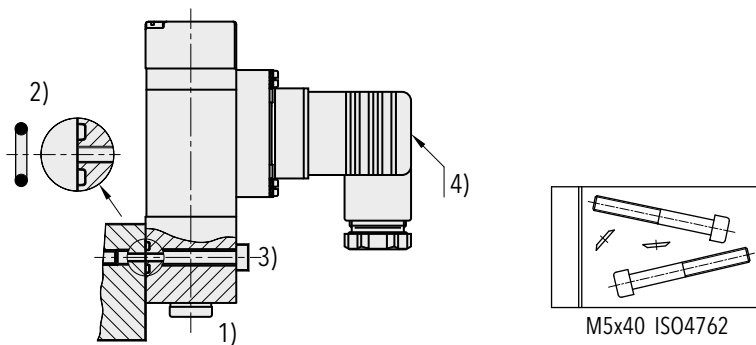

9D0.XXXX.XXX.XX.11

9D0.XXXX.XXX.XX.V3

- 1) Torque: G 1/8":  $M_A = 16 \dots 20 \text{ Nm}$   
G 1/4":  $M_A = 32 \dots 40 \text{ Nm}$
- 2) O-Ring:  $\phi 6.75 \times 1.78 \text{ NBR 70 Sh}$
- 3) Fixing screw: M5; property class: 8.8; torque: 4.5...6 Nm
- 4) Torque connector center screw: max. 0.4 Nm



## Switching differential typ. @ 25°C

<b>Measuring range of bellows sensor</b>	[bar]	-1 ... 6	-1 ... 8
<b>Microswitch 20</b> Switching differential (not adjustable)	[bar]	0.2	0.3
<b>Microswitch 28/83</b> Switching differential (not adjustable)	[bar]	0.15	0.2

## Electrical data switch

Type	Features	Rating	
		Resistive Load (Inductive Load)	
		AC	DC
20	Big switching differential	250 V, 10 (3) A	250 V, 0.1 (0.05) A 220 V, 0.25 (0.2) A 110 V, 0.5 (0.3) A 24 V, 2 (1) A
28	Small switching differential	250 V, 3 (1) A	250 V, 0.1 (0.05) A 220 V, 0.25 (0.2) A 110 V, 0.5 (0.3) A 24 V, 2 (1) A
83	Gold plated contacts, suitable for intrinsically safe control circuits		max. 30 V, 0.3 (0.2) A min. 5 V, 1 mA

## Electrical Connection



DIN 43650-5

## Additional information

<b>Documents</b>	Data sheet	/H72273
	Instructions	/H73273
	Flyer	/H70913

# PRESSOSTAT

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature.



## Applications

- Shipbuilding
- Engine manufacturing
- Railways
- Machine tools
- Hydraulics

## Features

- Rugged aluminium housing
- Protection IP65
- Any mounting position possible

Technical Data			
Measuring principle	Bellow	Repeatability	± 1.0 % FS typ.
Measuring range	-0.9 ... 1.5 to 10 ... 100 bar 5 ... 50 to 125 ... 1500 psi	Media temperature	-40°C ... +150°C
Output signal	1 Floating change-over contact (SPDT)	Ambient temperature	-25°C ... +70°C
Switching differential	Not adjustable	Approval / conformity	ABS, BV, CCS, DNV-GL, KRS, LRS, RINA EN60730-1/ EN60730-2-6: Typ 2.B.H

Subject to change






## Ordering information/type code

		XXX	XX	XX	XXXXXX	XX	XX
<b>Custom build code</b>	With display and adjusting screw	<b>900</b>					
	Without display, with adjusting screw	<b>904</b>					
	With display and adjusting knob	<b>912</b>					
<b>Microswitch</b>	Small switching differential, standard vibration resistance <sup>1) 2)</sup>					<b>10</b>	
	Average switching differential, standard vibration resistance <sup>1)</sup>					<b>11</b>	
	Average switching differential, increased vibration resistance <sup>1)</sup>					<b>23</b>	
	Large switching differential, high vibration resistance <sup>1)</sup>					<b>26</b>	
	With gold plated contacts, standard vibration resistance <sup>1)</sup>					<b>21</b>	


<b>Range</b>	<b>Range [bar]</b>	<b>Over pressure [bar]</b>	<b>Burst pressure [bar]</b>		<b>Range [psi]</b>	<b>Over pressure [psi]</b>	<b>Burst pressure [psi]</b>	
		-0.9 ... 1.5	10	13	<b>72</b>	5 ... 50	175	350
	0.2 ... 1.6	10	13	<b>73</b>	10 ... 100	350	500	<b>G8</b>
	0.2 ... 2.5	10	13	<b>75</b>	25 ... 200	350	500	<b>G9</b>
	0 ... 4	12	26	<b>76</b>	50 ... 500	500	1000	<b>H1</b>
	0 ... 6	12	26	<b>77</b>	125 ... 1500	1500	2300	<b>H3</b>
	1 ... 10	24	36	<b>78</b>				
	1 ... 16	24	36	<b>79</b>				
	2 ... 25	40	75	<b>80</b>				
	4 ... 40	40	75	<b>81</b>				
	6 ... 60	100	160	<b>82</b>				
	10 ... 100	100	160	<b>83</b>				

<b>Sensor</b>	<b>Sensor material</b>	<b>Sensor housing material</b>	<b>Thread</b>	<b>Range</b>		<b>Sensor material</b>	<b>Sensor housing material</b>	<b>Thread</b>	<b>Range</b>	
		Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	G1/4" female	72	<b>900</b>	Bronze bellow (CuSn6)	Brass chemically nickel plated	G1/4" female	78, 79
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	G1/4" female	73, 75	<b>901</b>	Bronze bellow (CuSn6)	Brass chemically nickel plated	G1/4" female	80, 81	<b>957</b>
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	G1/4" female	76, 77	<b>903</b>	Bronze bellow (CuSn6)	Brass chemically nickel plated	G1/2" male	72	<b>959</b>
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	G1/4" female	78, 79	<b>905</b>	Bronze bellow (CuSn6)	Brass chemically nickel plated	G1/2" male	73, 75	<b>952</b>
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	G1/4" female	80, 81	<b>907</b>	Bronze bellow (CuSn6)	Brass chemically nickel plated	G1/2" male	76, 77	<b>954</b>
	Stainless steel 1.4435	Brass (CuZn39Pb3)	G1/4" female	82, 83	<b>940</b>	Bronze bellow (CuSn6)	Brass chemically nickel plated	G1/2" male	78, 79	<b>956</b>
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	G1/2" male	72	<b>909</b>	Bronze bellow (CuSn6)	Brass chemically nickel plated	G1/2" male	80, 81	<b>958</b>
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	G1/2" male	73, 75	<b>902</b>	Stainless steel 1.4435	Brass nickel plated	G1/4" female	72	<b>800</b>
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	G1/2" male	76, 77	<b>904</b>	Stainless steel 1.4435	Brass nickel plated	G1/4" female	73, 75	<b>801</b>
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	G1/2" male	78, 79	<b>906</b>	Stainless steel 1.4435	Brass nickel plated	G1/4" female	76, 77	<b>803</b>
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	G1/2" male	80, 81	<b>908</b>	Stainless steel 1.4435	Brass nickel plated	G1/4" female	78, 79	<b>805</b>
	Stainless steel 1.4435	Brass	G1/2" male	82, 83	<b>941</b>	Stainless steel 1.4435	Brass nickel plated	G1/4" female	80, 81	<b>807</b>
	Bronze bellows (CuSn6)	Brass (CuZn39Pb3)	1/4" NPT female	G6	<b>G6.103</b>	Stainless steel 1.4435	Brass nickel plated	G1/4" female	82, 83	<b>840</b>
	Bronze bellows (CuSn6)	Brass (CuZn39Pb3)	1/4" NPT female	G8	<b>G8.105</b>	Stainless steel 1.4435	Brass nickel plated	G1/2" male	72	<b>809</b>
	Bronze bellows (CuSn6)	Brass (CuZn39Pb3)	1/4" NPT female	G9	<b>G9.105</b>	Stainless steel 1.4435	Brass nickel plated	G1/2" male	73, 75	<b>802</b>
	Bronze bellows (CuSn6)	Brass (CuZn39Pb3)	1/4" NPT female	H1	<b>H1.107</b>	Stainless steel 1.4435	Brass nickel plated	G1/2" male	76, 77	<b>804</b>
	Bronze bellows (CuSn6)	Brass (CuZn39Pb3)	1/4" NPT female	H3	<b>H3.140</b>	Stainless steel 1.4435	Brass nickel plated	G1/2" male	78, 79	<b>806</b>
	Bronze bellow (CuSn6)	Brass chemically nickel plated	G1/4" female	72	<b>950</b>	Stainless steel 1.4435	Brass nickel plated	G1/2" male	80, 81	<b>808</b>
	Bronze bellow (CuSn6)	Brass chemically nickel plated	G1/4" female	73, 75	<b>951</b>	Stainless steel 1.4435	Brass nickel plated	G1/2" male	82, 83	<b>841</b>
	Bronze bellow (CuSn6)	Brass chemically nickel plated	G1/4" female	76, 77	<b>953</b>					

	XXX	XX	XX	XXXXXX	XX	XX
<b>Fixing</b>	Direct on sensor or housing					00
	With mounting bracket					31
<b>Accessories</b>	Lead seal (manipulation protection)					16
	Screwed cable gland M20x1.5 (EN 50262) 					07
	Screwed cable gland M24x1.5 (DIN89280) 					27
	Screwed cable gland M18x1.5 (DIN89280) 					40
	Without screwed cable gland					33
	Railway version IEC 61373, category 2					28
	Damping elements and snubber see data sheet H72258					

<sup>1)</sup> Switching differential not adjustable  
<sup>2)</sup> Not suitable for applications under vibration

Standard products (extra short lead time)						
Product No.	Type Code	Pressure range [bar]	Over pressure max. [bar]	Switching differential [bar]	Diameter Y [mm]	Length X [mm]
P1.5	900 2672 900	-0.9 ... 1.5	10	0.1 (fixed)	45	56.5
P2.5	900 2675 901	0.2 ... 2.5	10	0.1 (fixed)	45	56.5
P4	900 2376 903	0 ... 4	12	0.2 (fixed)	33	47
P6	900 2377 903	0 ... 6	12	0.2 (fixed)	33	47
P10	900 2378 905	1 ... 10	24	0.4 (fixed)	27	42.5
P16	900 2379 905	1 ... 16	24	0.4 (fixed)	27	42.5
P25	900 2380 907	2 ... 25	40	1 (fixed)	33	47
P40	900 2381 907	4 ... 40	40	1 (fixed)	33	47
PS1.5	904 2672 900	-0.9 ... 1.5	10	0.1 (fixed)	45	56.5
PS2.5	904 2675 901	0.2 ... 2.5	10	0.1 (fixed)	45	56.5
PS6	904 2377 903	0 ... 6	12	0.2 (fixed)	33	47
PS16	904 2379 905	1 ... 16	24	0.4 (fixed)	27	42.5
PS40	904 2381 907	4 ... 40	40	1 (fixed)	27	42.5



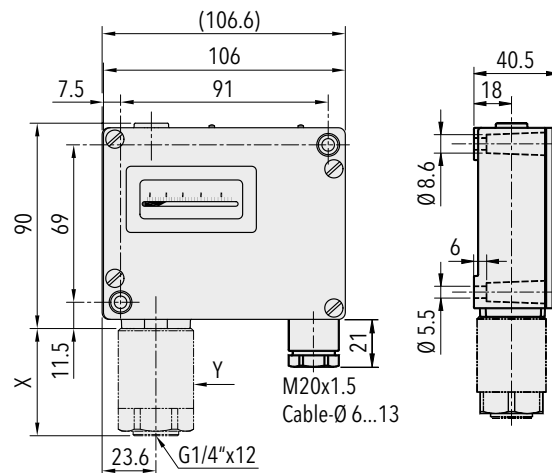


Specifications		
<b>Accuracy</b>	Repeatability	± 1.0 % FS typ.
	Scale accuracy typ.	± 2.0 % FS typ.
	Switching differential	See table
	Adjustment range switchpoint <sup>1)</sup>	10 % ... 90 % FS
<b>Environmental conditions</b>	Ambient temperature	-25°C ... +70°C
	Media temperature	-40°C ... +150°C
	Storage temperature	-25°C ... +85°C
	Protection	IP65
	Humidity	Max. 95% relative
	Vibration	Switch 23/26: 5...25 Hz: ±1.6 mm 25...100 Hz: 4 g Ranges 72, 73, 75, 5...50 Hz: 20 mm/sec.
	Shock	50 g / 11 ms
<b>Mechanical Data</b>	Sensor	See ordering information
	Housing	AlSi10Mg/ Epoxy coated
	Sealing	NBR
	Housing seal	EPDM 75 Sh
	Screwed cable gland	Brass nickel plated
	Male electrical plug	Polyamide (PA)
	Mounting torque	max. 25 Nm
	Installation	any position
	Weight	~ 710 g
<b>Microswitch</b>	Rating	See table
	Resistance of insulation	> 2 MΩ
	Dielectric strength	U ≤ 250V: 1.45 kV / U ≤ 500V: 2 kV terminal ground
	Life time (mechanical)	Microswitch 10/11: 20 Mio. cycles Microswitch 21: 0.5 Mio. cycles Microswitch 23/26: 0.3 Mio. cycles
<b>Electrical connection</b>	Electrical connections	Screw terminal
	Cable gland	M20x1.5 Cable-Ø 6...13 mm
	Terminal screw	3 x 1.5...4 mm <sup>2</sup>

<sup>1)</sup> Other adjustment ranges upon request


Additional information		
<b>Documents</b>	Data sheet	/H72252
	Instructions	/H71261
	Flyer	/H70911

## Dimensions

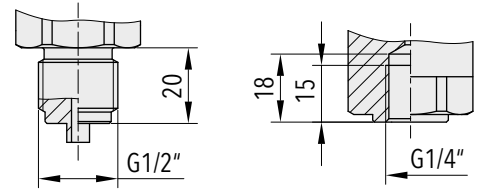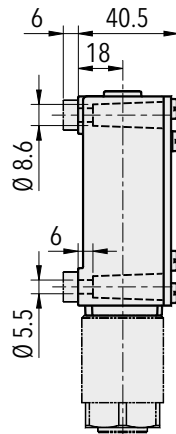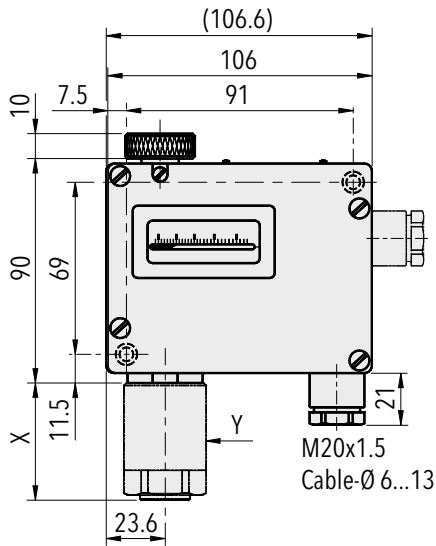


G1/2" male

G1/4" female




1/4" NPT female


Dimension X and Y see data sheet H72271




900.XX.XX.XXX.XX.XX




904.XX.XX.XXX.XX.XX



912.XX.XX.XXX.XX.XX

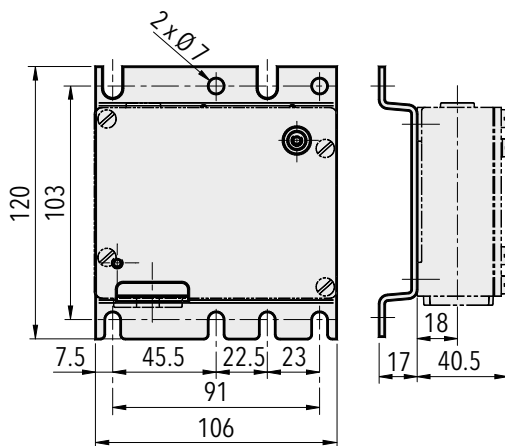


9XX.XX.XX.XXX.31.XX




9XX.XX.XX.XXX.XX.07

M20x1.5



9XX.XX.XX.XXX.XX.27

M24x1.5





9XX.XX.XX.XXX.XX.40


M18x1.5




Switching differential typ. @ 25°C						
Measuring range of bellows sensor	[bar]	-0.9 ... 1.5	0 ... 4	1 ... 10	2 ... 25	6 ... 60
		0.2 ... 1.6	0 ... 6	1 ... 16	4 ... 40	10 ... 100
		0.2 ... 2.5				
<b>Microswitch 10</b> Switching differential (not adjustable)	[bar]	0.03	0.08	0.2	0.5	1.5
<b>Microswitch 11/21/23</b> Switching differential (not adjustable)	[bar]	0.1	0.2	0.4	1.0	3.0
<b>Microswitch 26</b> Switching differential (not adjustable)	[bar]	0.1	0.3	0.8	2.0	5.0
Measuring range of bellows sensor	[psi]	5 ... 50	10 ... 100	50 ... 500	125 ... 1500	
			25 ... 200			
<b>Microswitch 10</b> Switching differential (not adjustable)	[psi]	1.2	3	7.5	22	
<b>Microswitch 11/21/23</b> Switching differential (not adjustable)	[psi]	3	6	14.5	44	
<b>Microswitch 26</b> Switching differential (not adjustable)	[psi]	4.4	12	30	72.5	

Electrical data switch			
Type	Features	Rating	
		Resistive Load (Inductive Load)	
		AC	DC
<b>10</b>	Small switching differential (not recommended for applications under vibrations)	125 V 10 (1.5) A 250 V 10 (1.25) A	250 V 0.2 (0.02) A 125 V 0.4 (0.03) A 30 V 2 (1) A 14 V 15 (2.5) A
<b>11</b>	Average switching differential, standard vibration resistance	125 V 15 (1.5) A 250 V 15 (1.25) A 500 V 10 (0.75) A	250 V 0.25 (0.03) A 125 V 0.5 (0.05) A 30 V 6 (1.5) A 14 V 15 (1.5) A
<b>23</b> 	Average switching differential, increased vibration resistance	125 V 15 (1.5) A 250 V 15 (1.25) A 500 V 10 (0.75) A	250 V 0.3 (0.05) A 125 V 0.6 (0.1) A 30 V 15 (1.5) A 14 V 15 (1.5) A
<b>26</b> 	Large switching differential, high vibration resistance	125 V 15 (1.5) A 250 V 15 (1.25) A 500 V 10 (0.75) A	250 V 0.3 (0.2) A 125 V 0.75 (0.4) A 30 V 15 (1.5) A 14 V 15 (1.5) A
<b>21</b>	With gold plated contacts, standard vibration resistance	24 V 0.1 (0.1) A 12 V 1.0 (1.0) A 5 V 2.0 (2.0) A	24 V 0.1 (0.1) A 12 V 1.0 (1.0) A 5 V 2.0 (2.0) A

## Electrical connection



Switch 10/11/23



Switch 21/26

# VARI PRESSOSTAT

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature.



## Applications

- Shipbuilding
- Engine manufacturing
- Railways
- Machine tools
- Hydraulics

## Features

- Rugged aluminium housing
- Protection IP65
- Any mounting position possible


Technical Data			
Measuring principle	Bellow	Repeatability	± 1.0 % FS typ.
Measuring range	-0.9 ... 1.5 to 4 ... 40 bar 5 ... 50 to 50 ... 500 psi	Media temperature	-40°C ... +150°C
Output signal	1 Floating change-over contact (SPDT)	Ambient temperature	-25°C ... +70°C
Switching differential	Adjustable	Approval / conformity	ABS, BV, CCS, GL, KRS, LRS, RINA EN60730-1/ EN60730-2-6: Typ 2.B.H
Switching point	Calibration for decreasing pressure		

Subject to change

# PV/PVF 903/907/915/940/941/942

Rometec srl - [www.rometec.it](http://www.rometec.it) - [info@rometec.it](mailto:info@rometec.it) - Rometec srl - [www.rometec.it](http://www.rometec.it) - [info@rometec.it](mailto:info@rometec.it)

## Ordering information/type code

		XXX	XX	XX	XXXXXX	XX	XX
<b>Custom build code</b>	Large adjustable switching differential, with display and internal adjustment screw	<b>903</b>					
	Large adjustable switching differential, without display, with internal adjustment screw	<b>907</b>					
	Large adjustable switching differential, with display and external adjustment screw	<b>915</b>					
	Small adjustable switching differential, with display and internal adjustment screw	<b>940</b>					
	Small adjustable switching differential, without display, with internal adjustment screw	<b>941</b>					
	Small adjustable switching differential, with display and external adjustment screw	<b>942</b>					
<b>Microswitch</b>	Standard vibration resistance <sup>1) 3)</sup>		<b>11</b>				
	High vibration resistance <sup>3)</sup>		<b>12</b>				
	Increased vibration resistance  <sup>3)</sup>		<b>23</b>				




Range	Range [bar]	Over pressure [bar]	Burst pressure [bar]	Range [psi]	Over pressure [psi]	Burst pressure [psi]		
		-0.9 ... 1.5	10	13	72	5 ... 50	175	350
	0.2 ... 1.6	10	13	<b>73</b>	10 ... 100	350	500	<b>G8</b>
	0.2 ... 2.5	10	13	<b>75</b>	25 ... 200	350	500	<b>G9</b>
	0 ... 4	12	26	<b>76</b>	50 ... 500	500	1000	<b>H1</b>
	0 ... 6	12	26	<b>77</b>				
	1 ... 10	24	36	<b>78</b>				
	1 ... 16	24	36	<b>79</b>				
	2 ... 25	40	75	<b>80</b>				
	4 ... 40	40	75	<b>81</b>				

Sensor	Sensor material	Sensor housing material	Thread	Range		Sensor material	Sensor housing material	Thread	Range	
		Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	G1/4" female	72	<b>900</b>	Bronze bellow (CuSn6)	Brass chemically nickel plated	G1/4" female	78, 79
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	G1/4" female	73, 75	<b>901</b>	Bronze bellow (CuSn6)	Brass chemically nickel plated	G1/4" female	80, 81	<b>957</b>
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	G1/4" female	76, 77	<b>903</b>	Bronze bellow (CuSn6)	Brass chemically nickel plated	G1/2" male	72	<b>959</b>
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	G1/4" female	78, 79	<b>905</b>	Bronze bellow (CuSn6)	Brass chemically nickel plated	G1/2" male	73, 75	<b>952</b>
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	G1/4" female	80, 81	<b>907</b>	Bronze bellow (CuSn6)	Brass chemically nickel plated	G1/2" male	76, 77	<b>954</b>
	Bellow stainless steel 1.4435	Brass (CuZn39Pb3)	G1/4" female	82, 83	<b>940</b>	Bronze bellow (CuSn6)	Brass chemically nickel plated	G1/2" male	78, 79	<b>956</b>
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	G1/2" male	72	<b>909</b>	Bronze bellow (CuSn6)	Brass chemically nickel plated	G1/2" male	80, 81	<b>958</b>
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	G1/2" male	73, 75	<b>902</b>	Bellows stainless steel 1.4435 <sup>2)</sup>	Brass nickel plated	G1/4" female	72	<b>800</b>
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	G1/2" male	76, 77	<b>904</b>	Bellows stainless steel 1.4435 <sup>2)</sup>	Brass nickel plated	G1/4" female	73, 75	<b>801</b>
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	G1/2" male	78, 79	<b>906</b>	Bellows stainless steel 1.4435 <sup>2)</sup>	Brass nickel plated	G1/4" female	76, 77	<b>803</b>
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	G1/2" male	80, 81	<b>908</b>	Bellows stainless steel 1.4435 <sup>2)</sup>	Brass nickel plated	G1/4" female	78, 79	<b>805</b>
	Bellow stainless steel 1.4435	Brass (CuZn39Pb3)	G1/2" male	82, 83	<b>941</b>	Bellows stainless steel 1.4435 <sup>2)</sup>	Brass nickel plated	G1/4" female	80, 81	<b>807</b>
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	1/4" NPT female	G6	<b>G6.103</b>	Bellows stainless steel 1.4435 <sup>2)</sup>	Brass nickel plated	G1/4" female	82, 83	<b>840</b>
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	1/4" NPT female	G8	<b>G8.105</b>	Bellows stainless steel 1.4435 <sup>2)</sup>	Brass nickel plated	G1/2" male	72	<b>809</b>
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	1/4" NPT female	G9	<b>G9.105</b>	Bellows stainless steel 1.4435 <sup>2)</sup>	Brass nickel plated	G1/2" male	73, 75	<b>802</b>
	Bronze bellow (CuSn6)	Brass (CuZn39Pb3)	1/4" NPT female	H1	<b>H1.107</b>	Bellows stainless steel 1.4435 <sup>2)</sup>	Brass nickel plated	G1/2" male	76, 77	<b>804</b>
	Bronze bellow (CuSn6)	Brass chemically nickel plated	G1/4" female	72	<b>950</b>	Bellows stainless steel 1.4435 <sup>2)</sup>	Brass nickel plated	G1/2" male	78, 79	<b>806</b>
	Bronze bellow (CuSn6)	Brass chemically nickel plated	G1/4" female	73, 75	<b>951</b>	Bellows stainless steel 1.4435 <sup>2)</sup>	Brass nickel plated	G1/2" male	80, 81	<b>808</b>
	Bronze bellow (CuSn6)	Brass chemically nickel plated	G1/4" female	76, 77	<b>953</b>	Bellows stainless steel 1.4435 <sup>2)</sup>	Brass nickel plated	G1/2" male	82, 83	<b>841</b>

Rometec srl - [www.rometec.it](http://www.rometec.it) - [info@rometec.it](mailto:info@rometec.it) - Rometec srl - [www.rometec.it](http://www.rometec.it) - [info@rometec.it](mailto:info@rometec.it)

# PV/PVF 903/907/915/940/941/942

Rometec srl - [www.rometec.it](http://www.rometec.it) - [info@rometec.it](mailto:info@rometec.it) - Rometec srl - [www.rometec.it](http://www.rometec.it) - [info@rometec.it](mailto:info@rometec.it)

	XXX	XX	XX	XXXXXX	XX	XX
<b>Fixing</b>	Direct on sensor or housing					00
	With mounting bracket					31
<b>Accessories</b>	Lead seal (manipulation protection)					16
	Screwed cable gland M20x1.5 (EN50262) 					07
	Screwed cable gland M24x1.5 (DIN89280) 					27
	Screwed cable gland M18x1.5 (DIN89280) 					40
	Damping elements and snubber see data sheet H72258					


<sup>1)</sup> Switch 11 only with typ No. 940, 941, 942

<sup>2)</sup> Material with medium contact: 1.4435

<sup>3)</sup> Switching differential adjustable

## Standard products (extra short lead time)

Product No.	Type Code	Pressure range [bar]	Over pressure max. [bar]	Switching differential [bar]	Diameter Y [mm]	Length X [mm]
PV6	903 2377 903	0 ... 6	12	0.4 ... 3.2 (adjustable)	33	47
PV16	903 2379 905	1 ... 16	24	1 ... 7.5 (adjustable)	27	42.5
PV40	903 2381 907	4 ... 40	40	3 ... 18 (adjustable)	27	42.5
PVF1.5	940 2372 900	-0.9 ... 1.5	10	0.06 ... 0.2 (adjustable)	45	56.5
PVF2.5	940 2375 901	0.2 ... 2.5	10	0.06 ... 0.2 (adjustable)	45	56.5
PVF6	940 2377 903	0 ... 6	12	0.2 ... 0.6 (adjustable)	33	47
PVF16	940 2379 905	1 ... 16	24	0.5 ... 1.6 (adjustable)	27	42.5

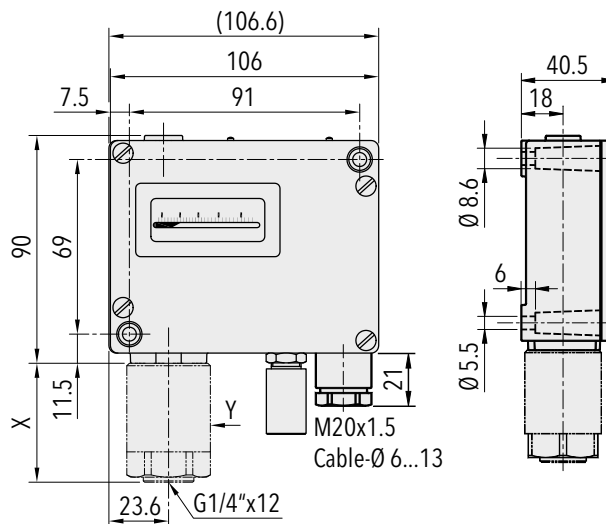

**trafaa**

Rometec srl - [www.rometec.it](http://www.rometec.it) - [info@rometec.it](mailto:info@rometec.it) - Rometec srl - [www.rometec.it](http://www.rometec.it) - [info@rometec.it](mailto:info@rometec.it)



Specifications		
<b>Accuracy</b>	Repeatability	± 1.0 % FS typ.
	Scale accuracy typ.	± 2.0 % FS typ.
	Switching differential	See table
	Adjustment range switchpoint <sup>1)</sup>	10% ... 90% FS
<b>Environmental conditions</b>	Ambient temperature	-25°C ... +70°C
	Media temperature	-40°C ... +150°C
	Storage temperature	-25°C ... +85°C
	Protection	IP65
	Humidity	Max.95 % relative
	Vibration	5...25 Hz: ±1.6 mm 25...100 Hz: 4g Ranges 72, 73, 75 5...50 Hz: 20 mm/sec.
	Shock	50g/ 11ms
<b>Mechanical Data</b>	Sensor	See ordering information
	Housing	AlSi10Mg/ Epoxy coated
	Sealing	NBR
	Screwed cable gland	Brass nickel plated
	Mounting torque	Max. 25 Nm
	Installation	any position
	Weight	~ 710 g
<b>Microswitch</b>	Rating	See table
	Resistance of insulation	500 VDC/100 MΩ
	Dielectric strength	2 kV terminal ground
	Life time (mechanical)	Microswitch 11: 20 Mio. cycles Microswitch 12/23: 0.3 Mio. cycles
<b>Electrical connection</b>	Electrical connections	Terminal screw
	Cable gland	M20x1.5 Cable-Ø 6...13 mm
	Terminal screw	3 x 1.5...4 mm <sup>2</sup>


<sup>1)</sup> Other adjustment ranges upon request

Additional information		
<b>Documents</b>	Data sheet	/H72257
	Instructions	/H71261
	Flyer	/H70910



# PV/PVF 903/907/915/940/941/942

Rometec srl - [www.rometec.it](http://www.rometec.it) - [info@rometec.it](mailto:info@rometec.it) - Rometec srl - [www.rometec.it](http://www.rometec.it) - [info@rometec.it](mailto:info@rometec.it)


## Dimensions

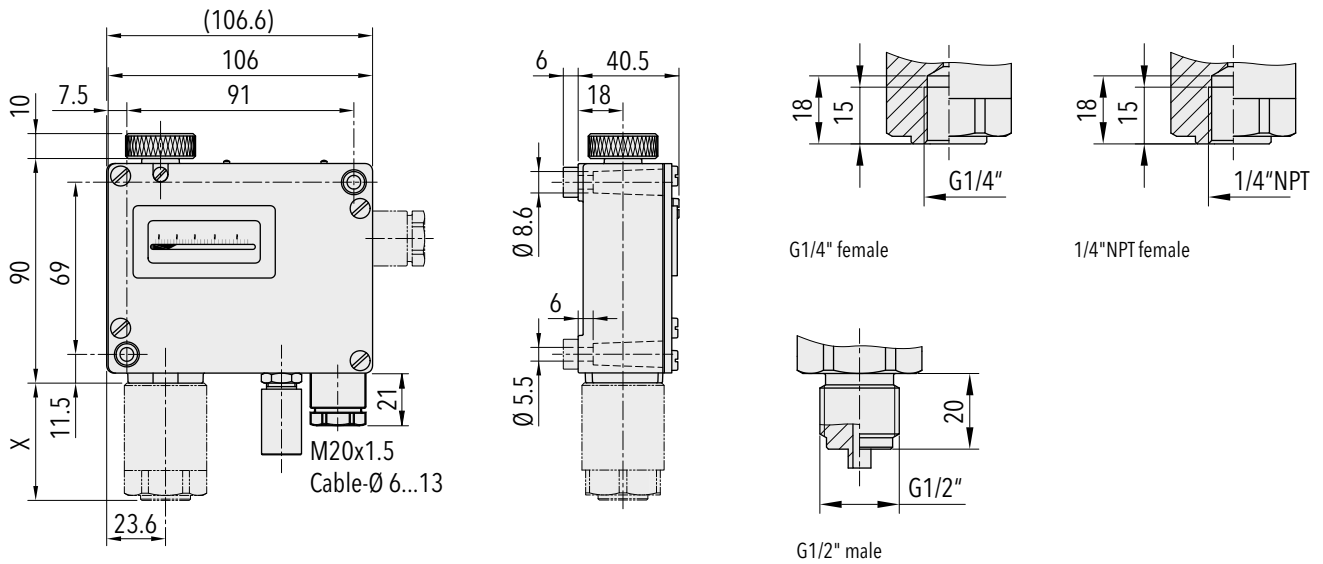


Dimension X and Y see data sheet H72271

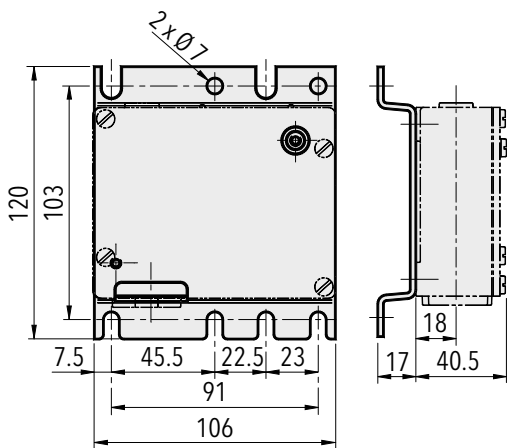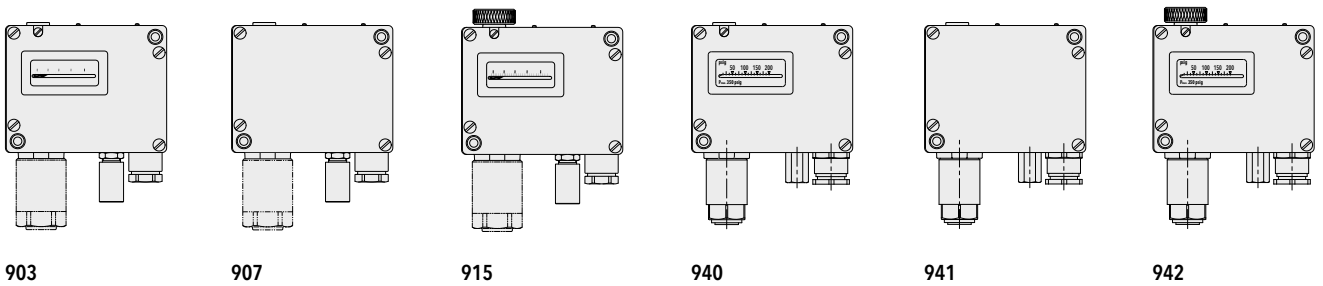


9XX.XX.XX.XXX.31.XX



9XX.XX.XX.XXX.XX.07



9XX.XX.XX.XXX.XX.27



9XX.XX.XX.XXX.XX.40



## Switching differential typ. @ 25°C


Measuring range of bellows sensor	[bar]	-0.9 ... 1.5	0 ... 4	1 ... 10	2 ... 25
		0.2 ... 1.6	0 ... 6	1 ... 16	4 ... 40
		0.2 ... 2.5			
Adjustable range of switching differential Microswitch 12, 23 (Type 903/907/915)	[bar]	0.1 ... 1.3	0.4 ... 3.2	1 ... 7.5	3 ... 18
Adjustable range of switching differential Microswitch 11, 12, 23 (Type 940/941/942)	[bar]	0.06 ... 0.2	0.2 ... 0.6	0.5 ... 1.6	1 ... 4
Measuring range of bellows sensor	[psi]	5 ... 50	10 ... 100 25 ... 200	50 ... 500	
		6 ... 40	15 ... 105	45 ... 260	
Adjustable range of switching differential Microswitch 12, 23 (Type 903/907/915)	[psi]	6 ... 40	15 ... 105	45 ... 260	
Adjustable range of switching differential Microswitch 11, 12, 23 (Type 940/941/942)	[psi]	3 ... 8	8 ... 20	15 ... 55	

## Electrical data switch

Type	Features	Rating	
		Resistive Load (Inductive Load)	
		AC	DC
11*)	Average switching differential	125 V, 15 (1.5) A 250 V, 15 (1.25) A 500 V, 10 (0.75) A	250 V, 0.25 (0.03) A 125 V, 0.5 (0.05) A 30 V, 6 (1.5) A 14 V, 15 (1.5) A
12	High vibration resistance; average switching differential	125 V, 15 (1.5) A 250 V, 15 (1.25) A 500 V, 10 (0.75) A	250 V, 0.3 (0.2) A 125 V, 0.75 (0.4) A 30 V, 15 (1.5) A 14 V, 15 (1.5) A
23	Increased vibration resistance; average switching differential	125 V, 15 (1.5) A 250 V, 15 (1.25) A 500 V, 10 (0.75) A	250 V, 0.3 (0.2) A 125 V, 0.6 (0.4) A 30 V, 15 (1.5) A 14 V, 15 (1.5) A

\*1) Switch 11 only with type No. 940, 941, 942

## Electrical Connection



Switch **11/12/23**

# PRESSOSTAT

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature.



## Applications

- Shipbuilding
- Engine manufacturing
- Railways
- Machine tools
- Hydraulics






## Features

- Rugged aluminium housing
- Protection IP65
- Any mounting position possible

Technical Data			
Measuring principle	Piston	Repeatability	± 1.0 % FS typ.
Measuring range	1 ... 10 to 60 ... 600 bar	Media temperature	O-Ring NBR: -30°C ... +100°C O-Ring FKM: -15°C ... +150°C
Output signal	1 Floating change-over contact (SPDT)	Ambient temperature	-20°C ... +70°C
Switching differential	Not adjustable	Approval / conformity	ABS, BV, CCS, DNV-GL, KRS, LRS, RINA EN60730-1/ EN60730-2-6: Typ 2.B.H

Subject to change

## Ordering information/type code


					XXX	XX	XX	XXX	XX	XX	
<b>Custom build code</b>	With display and adjusting screw				<b>944</b>						
	Without display, with adjusting screw				<b>947</b>						
<b>Microswitch</b>	Small switching differential, standard vibration resistance <sup>1) 2)</sup>									<b>10</b>	
	Average switching differential, standard vibration resistance <sup>1)</sup>									<b>11</b>	
	Average switching differential, increased vibration resistance  <sup>1)</sup>									<b>23</b>	
	Large switching differential, high vibration resistance  <sup>1)</sup>									<b>26</b>	
	With gold plated contacts, standard vibration resistance <sup>1)</sup>									<b>21</b>	
<b>Range</b>	<b>Range [bar]</b>	<b>Over pressure [bar]</b>	<b>Burst pressure [bar]</b>		<b>Range [bar]</b>	<b>Over pressure [bar]</b>	<b>Burst pressure [bar]</b>				
	1 ... 10	100	200	<b>78</b>	16 ... 160	400	600	<b>84</b>			
	4 ... 40	200	400	<b>81</b>	25 ... 250	400	600	<b>85</b>			
	6 ... 60	200	400	<b>82</b>	40 ... 400	800	1000	<b>86</b>			
	10 ... 100	200	400	<b>83</b>	60 ... 600	800	1000	<b>87</b>			
<b>Sensor</b>	<b>Sensor material</b>	<b>Sensor housing material</b>	<b>Thread</b>	<b>Range</b>		<b>Sensor material</b>	<b>Sensor housing material</b>	<b>Thread</b>	<b>Range</b>		
	1.4435, O-Ring NBR	1.4435	G1/4" female	78	<b>700</b>	1.4435, O-Ring NBR	1.4435	G1/2" male	82, 83	<b>710</b>	
	1.4435, O-ring FKM	1.4435	G1/4" female	78	<b>701</b>	1.4435, O-Ring FKM	1.4435	G1/2" male	82, 83	<b>711</b>	
	1.4435, O-ring NBR	1.4435	G1/2" male	78	<b>702</b>	1.4435, O-Ring NBR	1.4435	G1/4" female	84, 85	<b>712</b>	
	1.4435, O-ring FKM	1.4435	G1/2" male	78	<b>703</b>	1.4435, O-Ring FKM	1.4435	G1/4" female	84, 85	<b>713</b>	
	1.4435, O-Ring NBR	1.4435	G1/4" female	81	<b>704</b>	1.4435, O-Ring NBR	1.4435	G1/2" male	84, 85	<b>714</b>	
	1.4435, O-Ring FKM	1.4435	G1/4" female	81	<b>705</b>	1.4435, O-Ring FKM	1.4435	G1/2" male	84, 85	<b>715</b>	
	1.4435, O-Ring NBR	1.4435	G1/2" male	81	<b>706</b>	1.4435, O-Ring NBR	1.4435	G1/4" female	86, 87	<b>722</b>	
	1.4435, O-Ring FKM	1.4435	G1/2" male	81	<b>707</b>	1.4435, O-Ring FKM	1.4435	G1/4" female	86, 87	<b>723</b>	
	1.4435, O-Ring NBR	1.4435	G1/4" female	82, 83	<b>708</b>	1.4435, O-Ring NBR	1.4435	G1/2" male	86, 87	<b>724</b>	
	1.4435, O-Ring FKM	1.4435	G1/4" female	82, 83	<b>709</b>	1.4435, O-Ring FKM	1.4435	G1/2" male	86, 87	<b>725</b>	
	<b>Fixing</b>	Direct on sensor or housing									<b>00</b>
		With mounting bracket									<b>31</b>
	<b>Accessories</b>	Lead seal (manipulation protection)									<b>16</b>
		Screwed cable gland M20x1.5 (EN50262) 									<b>07</b>
		Screwed cable gland M24x1.5 (DIN89280) 									<b>27</b>
		Screwed cable gland M18x1.5 (DIN89280) 									<b>40</b>
		Damping elements and snubber see data sheet H72258									

<sup>1)</sup> Switching differential not adjustable

<sup>2)</sup> Not suitable for applications under vibration

Standard products (extra short lead time)

Product No.	Type Code	Pressure range [bar]	Over pressure max. [bar]	Switching differential [bar]	Diameter Y [mm]	Length X [mm]
PK10	944 2378 700	1 ... 10	100	0.45 ... 0.9 (fix)	33	47
PK40	944 2381 704	4 ... 40	200	1.8 ... 3.4 (fix)	27	42.5
PK100	944 2383 708	10 ... 100	200	3.2 ... 7.5 (fix)	27	42.5
PK250	944 2385 712	25 ... 250	400	5.2 ... 16 (fix)	27	42.5



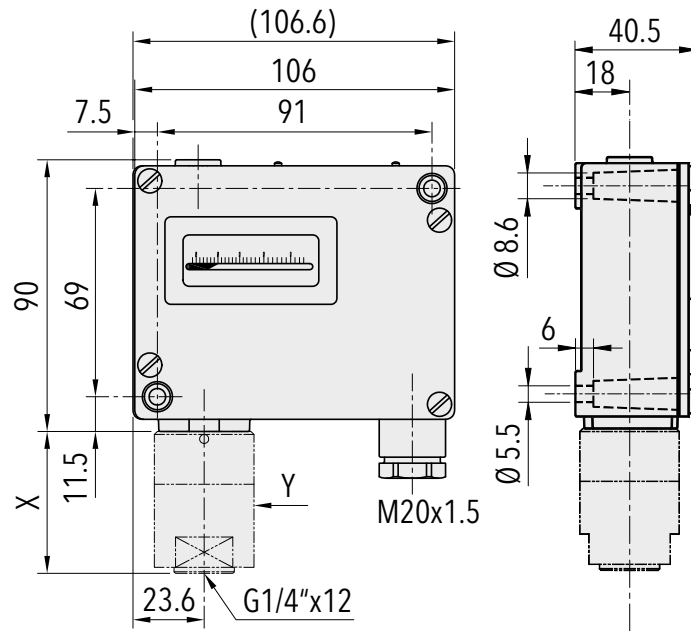


Specifications		
<b>Accuracy</b>	Repeatability	± 1.0 % FS typ.
	Scale accuracy typ.	± 2.0 % FS typ.
	Switching differential	See table
	Adjustment range switchpoint <sup>1)</sup>	10% ... 90% FS
<b>Environmental conditions</b>	Ambient temperature	-20°C ... +70°C
	Media temperature	O-Ring NBR: -30°C ... +100°C O-Ring FKM: -15°C ... +150°C
	Storage temperature	-25°C ... +85°C
	Protection	IP65
	Humidity	Max.95 % relative
	Vibration	Switch 23/26: 5...25 Hz: ±1.6 mm 25...100 Hz: 4g
	Shock	50g/ 11ms
<b>Mechanical Data</b>	Sensor	1.4435
	Housing	AlSi10Mg/ Epoxy coated
	Sealing	NBR/FKM
	Screwed cable gland	Brass nickel plated
	Mounting torque	Max. 25 Nm
	Installation	any position
	Weight	~ 710 g
<b>Microswitch</b>	Rating	See table
	Resistance of insulation	500 VDC / 100 MΩ
	Dielectric strength	U ≤ 250V: 1.45 kV / U ≤ 500V: 2 kV terminal ground
	Life time (mechanical)	Microswitch 10/11: 20 Mio. cycles Microswitch 21: 0.5 Mio. cycles Microswitch 23/26: 0.3 Mio. cycles
<b>Electrical connection</b>	Electrical connections	Terminal screw
	Cable gland	M20x1.5 Cable-Ø 6...13 mm
	Terminal screw	3 x 1.5...4 mm <sup>2</sup>

<sup>1)</sup> Other adjustment ranges upon request

Additional information		
<b>Documents</b>	Data sheet	/H72259
	Instructions	/H71261
	Flyer	/H70912


## Dimensions

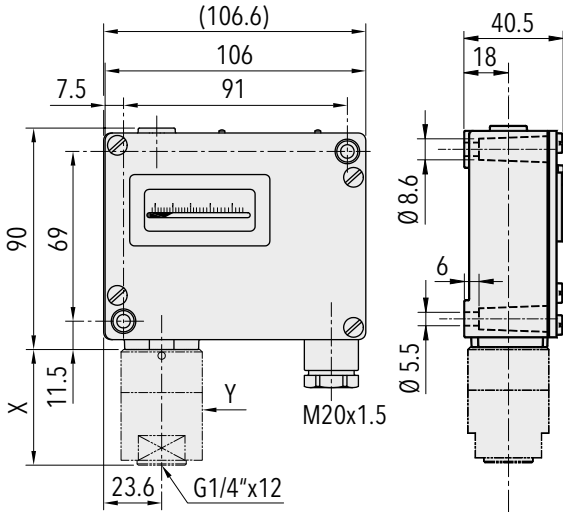


Dimension X and Y see data sheet H72271

G1/4" female


G1/2" male





944.XX.XX.XXX.XX.XX




947.XX.XX.XXX.XX.XX

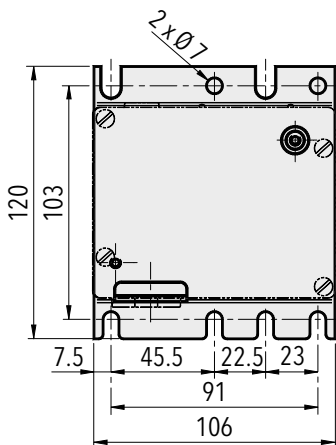


94X.XX.XX.XXX.31.XX



94X.XX.XX.XXX.XX.07  
M20x1.5



94X.XX.XX.XXX.XX.27  
M24x1.5





94X.XX.XX.XXX.XX.40  
M18x1.5







Switching differential typ. @ 25°C									
<b>Measuring range of piston sensor</b>	[bar]	1 ... 10	4 ... 40	6 ... 60	10 ... 100	16 ... 160	25 ... 250	40 ... 400	60 ... 600
<b>Microswitch 10</b> Switching differential (not adjustable, variable according to set point)	[bar]	0.4 ... 0.8	1.5 ... 2.5	2.0 ... 3.7	2.6 ... 5.5	3.4 ... 8.0	4.3 ... 11	5.3 ... 16	6.5 ... 21
<b>Microswitch 11, 21, 23</b> Switching differential (not adjustable, variable according to set point)	[bar]	0.45 ... 0.9	1.8 ... 3.4	2.3 ... 4.8	3.2 ... 7.5	4.1 ... 11	5.2 ... 16	6.5 ... 23	8.0 ... 32
<b>Microswitch 26</b> Switching differential (not adjustable, variable according to set point)	[bar]	0.55 ... 1.1	2.0 ... 4.0	2.7 ... 5.7	3.7 ... 9.0	4.7 ... 13	6.0 ... 19	7.5 ... 28	9.0 ... 38

Electrical data switch		Rating	
		Resistive Load (Inductive Load)	
Type	Features	AC	DC
<b>10</b>	Small switching differential (not recommended for applications under vibrations)	125 V, 10 (1.5) A 250 V, 10 (1.25) A	250 V, 0.2 (0.02) A 125 V, 0.4 (0.03) A 30 V, 2 (1) A 14 V, 15 (2.5) A
<b>11</b>	Average switching differential, standard vibration resistance	125 V, 15 (1.5) A 250 V, 15 (1.25) A 500 V, 10 (0.75) A	250 V, 0.25 (0.03) A 125 V, 0.5 (0.05) A 30 V, 6 (1.5) A 14 V, 15 (1.5) A
<b>23</b> 	Average switching differential, increased vibration resistance	125 V, 15 (1.5) A 250 V, 15 (1.25) A 500 V, 10 (0.75) A	250 V, 0.3 (0.05) A 125 V, 0.6 (0.1) A 30 V, 15 (1.5) A 14 V, 15 (1.5) A
<b>26</b> 	Large switching differential, high vibration resistance	125 V, 15 (1.5) A 250 V, 15 (1.25) A 500 V, 10 (0.75) A	250 V, 0.3 (0.2) A 125 V, 0.75 (0.4) A 30 V, 15 (1.5) A 14 V, 15 (1.5) A
<b>21</b>	With gold plated contacts, standard vibration resistance	24 V, 0.1 (0.1) A 12 V, 1 (1.0) A 5 V, 2 (2.0) A	24 V, 0.1 (0.1) A 12 V, 1 (1.0) A 5 V, 2 (2.0) A

## Electrical Connection



Switch 11/12/23



Switch 26

# DIFFERENTIAL PRESSURE PRESSOSTAT

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature.



## Applications

- Shipbuilding
- Engine manufacturing
- Railways
- Machine tools
- Hydraulics



## Features

- Rugged aluminium housing
- Protection IP65
- Any mounting position possible

Technical Data			
Measuring principle	Bellow	Repeatability	± 1.0 % FS typ.
Measuring range	-1 ... 6 to -1 ... 18 bar	Media temperature	-40°C ... +150°C
Differential pressure	-0.6 ... 3.4 to 1 ... 16 bar	Ambient temperature	-25°C ... +70°C
Output signal	1 Floating change-over contact (SPDT)	Approval / conformity	ABS, BV, CCS, DNV-GL, KRS, LRS, RINA EN60730-1/ EN60730-2-6: Typ 2.B.H
Switching differential	Not adjustable		

Subject to change

## Ordering information/type code

				XXX	XX	XX	XXX	XX	XX
<b>Custom build code</b>	With display and adjusting screw			920					
	Without display, with adjusting screw			924					
	With display and adjusting knob			932					
<b>Microswitch</b>	Small switching differential, standard vibration resistance <sup>1) 2)</sup>				10				
	Average switching differential, standard vibration resistance <sup>1)</sup>				11				
	Average switching differential, increased vibration resistance  <sup>1)</sup>				23				
	Large switching differential, high vibration resistance  <sup>1)</sup>				26				
	With gold plated contacts, standard vibration resistance <sup>1)</sup>				21				
<b>Range</b>	<b>Range [bar]</b>	<b>Differential pressure [bar]</b>	<b>Over pressure [bar]</b>	<b>Burst pressure [bar]</b>					
	-1 ... 6	-0.6 ... 3.4	12	26				74	
	-1 ... 6	0 ... 4	12	26				76	
	-1 ... 8	0 ... 6	12	26				77	
	-1 ... 12	1 ... 10	24	36				78	
	-1 ... 18	1 ... 16	24	36				79	
<b>Sensor</b>	<b>Sensor material</b>	<b>Sensor housing material</b>	<b>Range</b>	<b>Thread</b>					
	Bellows: 1.4435, medium contact. parts 1.4435	Brass nickel plated	74	G1/4" female				830	
	Bellows: 1.4435, medium contact. parts 1.4435	Brass nickel plated	74	G1/8" female				831	
	Bellows: 1.4435, medium contact. parts 1.4435	Brass nickel plated	74	G1/2" male				832	
	Bellows: 1.4435, medium contact. parts 1.4435	Brass nickel plated	76, 77	G1/8" female				833	
	Bellows: 1.4435, medium contact. parts 1.4435	Brass nickel plated	76, 77	G1/2" male				834	
	Bellows: 1.4435, medium contact. parts 1.4435	Brass nickel plated	76, 77	G1/4" female				837	
	Bellows: 1.4435, medium contact. parts 1.4435	Brass nickel plated	78, 79	G1/8" female				835	
	Bellows: 1.4435, medium contact. parts 1.4435	Brass nickel plated	78, 79	G1/2" male				836	
	Bellows: 1.4435, medium contact. parts 1.4435	Brass nickel plated	78, 79	G1/4" female				838	
	Bronze	Brass	74	G1/4" female				930	
	Bronze	Brass	74	G1/8" female				931	
	Bronze	Brass	74	G1/2" male				932	
	Bronze	Brass	76, 77	G1/8" female				933	
	Bronze	Brass	76, 77	G1/2" male				934	
	Bronze	Brass	76, 77	G1/4" female				937	
	Bronze	Brass	78, 79	G1/8" female				935	
	Bronze	Brass	78, 79	G1/2" male				936	
	Bronze	Brass	78, 79	G1/4" female				938	
	Bronze	Brass chemically nickel plated	74	G1/4" female				980	
	Bronze	Brass chemically nickel plated	74	G1/8" female				981	
	Bronze	Brass chemically nickel plated	74	G1/2" male				982	
	Bronze	Brass chemically nickel plated	76, 77	G1/8" female				983	
	Bronze	Brass chemically nickel plated	76, 77	G1/2" male				984	
	Bronze	Brass chemically nickel plated	76, 77	G1/4" female				987	
	Bronze	Brass chemically nickel plated	78, 79	G1/8" female				985	
	Bronze	Brass chemically nickel plated	78, 79	G1/2" male				986	
Bronze	Brass chemically nickel plated	78, 79	G1/4" female				988		
<b>Fixing</b>	Direct on sensor or housing								00
	By mounting bracket								31

XXX XX XX XXX XX XX


Accessories		
Lead seal (manipulation protection)		16
Screwed cable gland M20x1.5 (EN50262)		07
Screwed cable gland M24x1.5 (DIN89280)		27
Screwed cable gland M18x1.5 (DIN89280)		40
Adapter G1/8" male - G1/2" male, Brass		A6
Adapter G1/8" male - G1/2" male, Brass nickel plated		B6
Adapter G1/8" male - G1/2" male, Stainless steel 1.4435		D6
Adapter G1/8" male - G1/4" female, Brass		A5
Adapter G1/8" male - G1/4" female, Brass nickel plated		B5
Adapter G1/8" male - G1/4" female, Stainless steel 1.4435		D5
Damping elements and snubber see data sheet H72258		

<sup>1)</sup> Switching differential not adjustable

<sup>2)</sup> Not suitable for applications under vibration

### Standard products (extra short lead time)

Product No.	Type Code	Pressure range [bar]	Differential pressure [bar]	Over pressure max. [bar]	Switching differential [bar]	Length X [mm]
PD3.4	920 2374 931	-1 ... +6	-0.6 ... +3.4	12	0.16 (fixed)	77
PD6	920 2377 933	-1 ... +8	0 ... 6	12	0.16 (fixed)	77
PD16	920 2379 935	-1 ... 18	1 ... 16	24	0.4 (fixed)	87

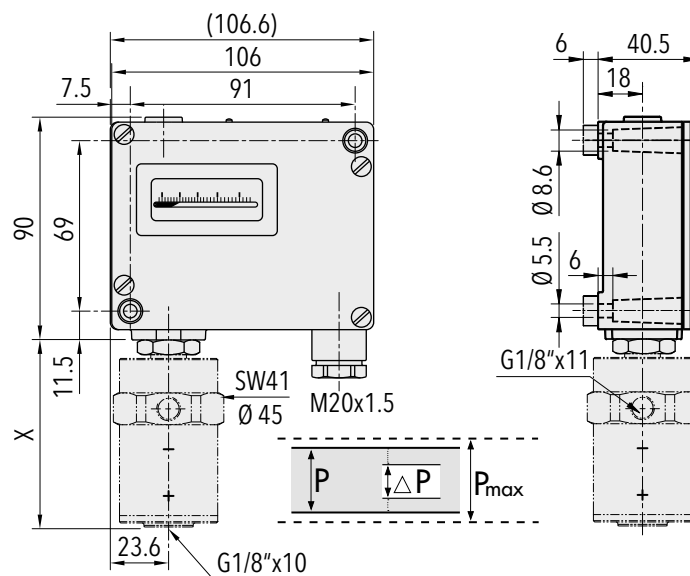


Specifications		
<b>Accuracy</b>	Repeatability	± 1.0 % FS typ.
	Scale accuracy typ.	± 2.0 % FS typ.
	Switching differential	See table
	Adjustment range switch point <sup>1)</sup>	0 ... 100% Differential pressure
<b>Environmental conditions</b>	Ambient temperature	-25°C ... +70°C
	Media temperature	-40°C ... +150°C
	Storage temperature	-25°C ... +85°C
	Protection	IP65
	Humidity	Max. 95 % relative
	Vibration	Switch 23/26: 5...25 Hz: ±1.6 mm 25...100 Hz: 4 g
	Shock	50 g / 11 ms
<b>Mechanical Data</b>	Sensor	See ordering information
	Housing	AlSi10Mg/ Epoxy coated
	Sealing	NBR
	Screwed cable gland	Brass nickel plated
	Mounting torque	Max. 25 Nm
	Installation	any position
	Weight	~ 610 g
<b>Microswitch</b>	Rating	See table
	Resistance of insulation	> 2 MΩ
	Dielectric strength	U ≤ 250V: 1.45 kV/ U ≤ 500V: 2 kV terminal ground
	Life time (mechanical)	Microswitch 10/11: 20 Mio. cycles Microswitch 21: 0.5 Mio. cycles Microswitch 23/26: 0.3 Mio. cycles
<b>Electrical connection</b>	Electrical connections	Screw terminal
	Cable gland	M20x1.5 Cable-Ø 6...13 mm
	Terminal screw	3 x 1.5...4 mm <sup>2</sup>


<sup>1)</sup> Other adjustment ranges upon request

Additional information		
<b>Documents</b>	Data sheet	/H72253
	Instructions	/H73256
	Flyer	/H70914


## Dimensions

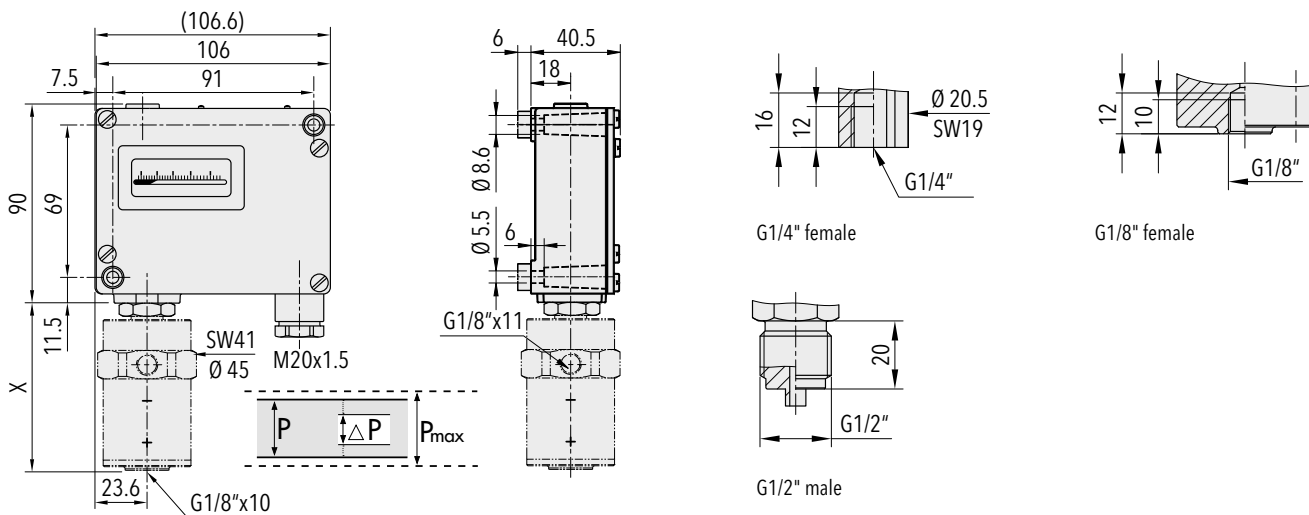


Dimension X and Y see data sheet H72271

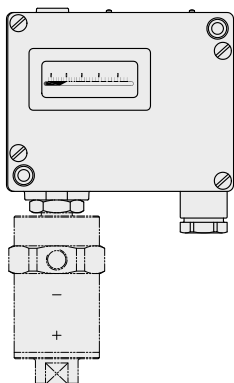


920.XX.XX.XXX.XX.XX

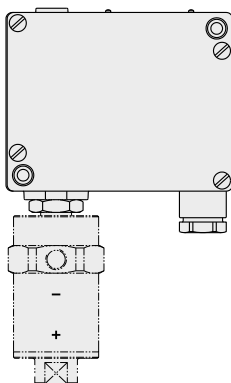


924.XX.XX.XXX.XX.XX

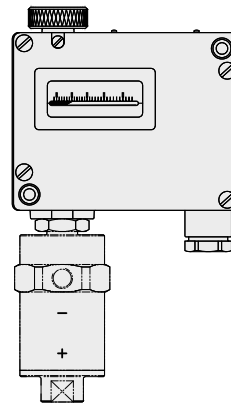


932.XX.XX.XXX.XX.XX

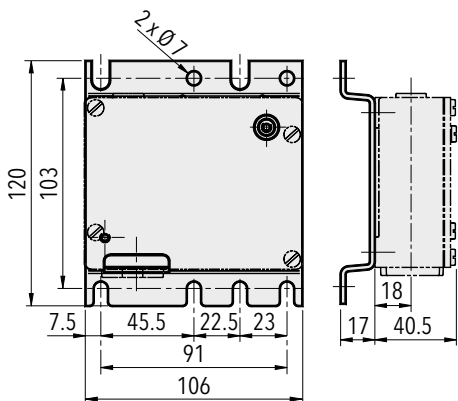


9XX.XX.XX.XXX.31.XX




9XX.XX.XX.XXX.XX.07  
M20x1.5




9XX.XX.XX.XXX.XX.27  
M24x1.5



9XX.XX.XX.XXX.XX.40  
M18x1.5



A5 / B5 / D5





A6 / B6 / D6


## Switching differential typ. @ 25°C

<b>Range of piston sensor</b>	[bar]	-1 ... 6 -1 ... 8	-1 ... 12 -1 ... 18
<b>Microswitch 10</b> Switching differential (not adjustable)	[bar]	0.08	0.2
<b>Microswitch 11/21/23</b> Switching differential (not adjustable)	[bar]	0.16	0.4
<b>Microswitch 26</b> Switching differential (not adjustable)	[bar]	0.25	0.5


## Electrical data switch

Type	Features	Rating	
		Resistive Load (Inductive Load)	
		AC	DC
<b>10</b>	Small switching differential (not recommended for applications under vibrations)	125 V, 10 (1.5) A 250 V, 10 (1.25) A	250 V, 0.2 (0.02) A 125 V, 0.4 (0.03) A 30 V, 2 (1) A 14 V, 15 (2.5) A
<b>11</b>	Average switching differential, standard vibration resistance	125 V, 15 (1.5) A 250 V, 15 (1.25) A 500 V, 10 (0.75) A	250 V, 0.25 (0.03) A 125 V, 0.5 (0.05) A 30 V, 6 (1.5) A 14 V, 15 (1.5) A
<b>23</b> 	Average switching differential, increased vibration resistance	125 V, 15 (1.5) A 250 V, 15 (1.25) A 500 V, 10 (0.75) A	250 V, 0.3 (0.05) A 125 V, 0.6 (0.1) A 30 V, 15 (1.5) A 14 V, 15 (1.5) A
<b>26</b> 	Large switching differential, high vibration resistance	125 V, 15 (1.5) A 250 V, 15 (1.25) A 500 V, 10 (0.75) A	250 V, 0.3 (0.2) A 125 V, 0.75 (0.4) A 30 V, 15 (1.5) A 14 V, 15 (1.5) A
<b>21</b>	With gold plated contacts, standard vibration resistance	24 V, 0.1 (0.1) A 12 V, 1.0 (1.0) A 5 V, 2.0 (2.0) A	24 V, 0.1 (0.1) A 12 V, 1.0 (1.0) A 5 V, 2.0 (2.0) A

## Electrical Connection



Switch 10/11/23



Switch 21/26

# PRESSOSTAT

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature.



## Applications

- Machine tools
- Medium voltage switchgear

## Features

- Steel or bronze bellows
- Blade connector (IEC) 2.8 x 0.5 mm
- Compact design
- Adjustment in factory

Technical Data			
Measuring principle	Bellow	Repeatability	$\pm 1.0 \%$ FS typ.
Measuring range	-0.3 ... 1.3 to 1 ... 10 bar	Media temperature	-25°C ... +80°C
Output signal	1 or 2 floating change-over contacts (SPDT)	Ambient temperature	-25°C ... +70°C
Switching differential	Not adjustable	Approval / conformity	EN60730-1/ EN60730-2-6: Typ 2.B.H
Switching point	Adjustment in factory		

Subject to change



## Ordering information/type code



				XXX	XX	XX	XXX	XX	XX	XX	
<b>Custom build code</b>	1 Floating change-over contact (SPDT)			987							
	2 Floating change-over contacts (SPDT)			988							
<b>Microswitch</b>	Standard contacts, switching differential not adjustable				42						
	Gold plated contacts, switching differential not adjustable				84						
<b>Range</b>	<b>Range [bar]</b>	<b>Over pressure [bar]</b>	<b>Burst pressure [bar]</b>								
	-0.3 ... 1.3	-1 ... 4	10						72		
	0 ... 1.6	-1 ... 4	10						73		
	0 ... 2.5	-1 ... 4	10						75		
	0 ... 4	-1 ... 6	10						76		
	1 ... 10	-1 ... 15	15						78		
<b>Sensor</b>	<b>Sensor material</b>	<b>Pressure connection</b>	<b>Range</b>								
	Bellows: 1.4301 (AISI 304)	1.4301 (AISI 304), with groove for O-ring	73, 75						847		
	Bellows: 1.4301 (AISI 304)	1.4301 (AISI 304), with groove for O-ring	76						846		
	Bellows: Bronze (CuSn6)	Brass (CuZn39Pb3), without groove for O-ring	72, 73, 75						947		
	Bellows: Bronze (CuSn6)	Brass (CuZn39Pb3), without groove for O-ring	76						946		
	Bellows: Bronze (CuSn6)	Brass (CuZn39Pb3), without groove for O-ring	78						945		
	Bellows: Bronze (CuSn6)	Brass (CuZn39Pb3), with groove for O-ring	72, 73, 75						949		
	Bellows: Bronze (CuSn6)	Brass (CuZn39Pb3), with groove for O-ring	76						948		
Bellows: Bronze (CuSn6)	Brass (CuZn39Pb3), with groove for O-ring	78						939			
<b>Code number</b>	Specified by Trafag									XX	
<b>Fixing</b>	Direct on sensor or housing									00	
<b>Accessories</b>	Blade receptacle (2.8 x 0.5 mm) and insulator for flat plugs (2 x 6 pcs.)									09	
	Switchpoint fixed and sealed upon customer's request									88	
	Switchpoint preset upon customer's request, no guarantee on switching accuracy									83	
	Switchpoint adjustment switch I (lower switchpoint) and switch II (upper switchpoint)										
	Please indicate for each switch when ordering: - Switchpoint [bar] - Increasing or decreasing										
	Routine test of leakage rate <math>< 10^{-7}</math> mbar-l/s										05
Damping elements and snubber see data sheet H72258											

Specifications		
<b>Accuracy</b>	Repeatability	± 1.0 % FS typ.
	Switching differential	See table
	Adjustment range switchpoint <sup>1)</sup>	10% ... 90% FS
<b>Environmental conditions</b>	Ambient temperature	-25°C ... +70°C
	Media temperature	-25°C ... +80°C
	Storage temperature	-40°C ... +80°C
	Protection	IP40 (Microswitch IP67)
	Humidity	Max.95 % relative
	Vibration	5 ... 100 Hz: 2 g
	Shock	50g/ 11ms
<b>Mechanical Data</b>	Sensor	See ordering information
	Housing	PBTP, Crastin
	Sealing	-
	Mounting torque	Max. 25 Nm
	Installation	any position
	Weight	~ 110 g
	<b>Microswitch</b>	Rating
Resistance of insulation		> 2 MΩ, 500 VDC
Dielectric strength		2 kV terminal ground
Life time (mechanical)		2 Mio. cycles
<b>Electrical connection</b>	Electrical connections	Blade connector
	Blade connector	IEC 2.8 x 0.5 mm 0.75...1 mm <sup>2</sup>



<sup>1)</sup> Pressure range 1 ... 10 bar; Max. 2 bar switchpoint difference between switch I and switch II  
Other adjustment ranges upon request

Additional information		
<b>Documents</b>	Data sheet	/H72272
	Instructions	/H73272
	Flyer	/H70915

**Dimensions**





98X.XXXX.945/946/947

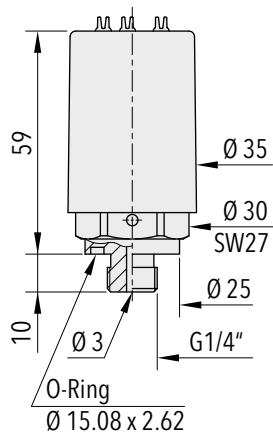


98X.XXXX.939/948/949

(O-Ring not included in delivery)

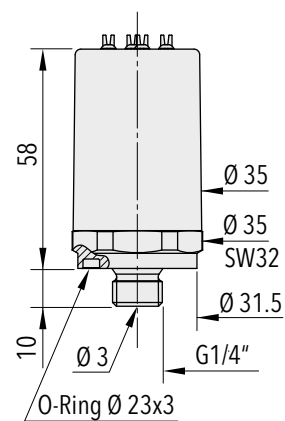

98X.XXXX.846/847

(O-Ring not included in delivery)




98X.XXXX.XXX.XX.XX.09


Switching differential typ. @ 25°C						
Measuring range of bellows sensor	[bar]	-0.3 ... 1.3	0 ... 1.6	0 ... 2.5	0 ... 4	1 ... 10
Microswitch 42/84	[bar]	0.1	0.1	0.2	0.3	0.6
Switching differential (not adjustable)						
Tolerance of setting	[bar]	±0.08	±0.08	±0.12	±0.16	±0.2

Electrical data switch		Rating	
		Resistive Load (Inductive Load)	
Type	Features	AC	DC
42 (Standard)	Silver contacts	250 V, 6 (1) A	220 V, 0.25 (0.1) A 110 V, 0.5 (0.2) A 60 V, 1(0.5) A 24 V, 3 (2) A 12 V, 6 (6) A
84	Gold plated contacts, suitable for intrinsically safe control circuits	max. 30 V, 0.1 (0.1) A min. 5 V, 5 mA	

### Electrical connection



987

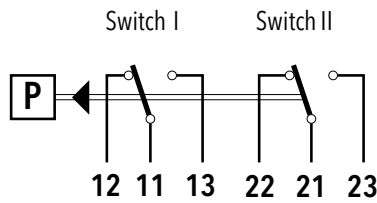

988

# EX PRESSOSTAT

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature.



## Applications

- Ex II 2G / D

## Features

- Rugged aluminium housing, option: housing stainless steel
- Protection IP66
- Any mounting position possible
- Ex db eb IIC T6 Gb
- Ex tb IIIC T80°C Db

Technical Data			
Measuring principle	Bellow	Media temperature	-40°C ... +150°C
Measuring range	-0.9 ... 1.5 to 4 ... 40 bar	Ambient temperature	-50°C ... +65°C
Output signal	1 Floating change-over contact (SPDT)	Approval / conformity	SEV 15 ATEX 0157 X IECEX SEV 17.0013X
Switching differential	Not adjustable	Type of protection	Areas with gaz explosion hazards: II 2G Ex db eb IIC T6 Gb Areas with dust explosion hazards: II 2D Ex tb IIIC T80°C Db
Repeatability	± 1.0 % FS typ.		


Subject to change

## Ordering information/type code

		XXX	XX	XX	XXX	XX	XX				
<b>Custom build code</b>	With display and adjusting screw	900									
	Without display, with adjusting screw	904									
	With display and adjusting knob	912									
<b>Microswitch</b>	Standard, not adjustable					91					
<b>Range</b>	<b>Range [bar]</b>	<b>Over pressure [bar]</b>	<b>Burst pressure [bar]</b>		<b>Range [bar]</b>	<b>Over pressure [bar]</b>	<b>Burst pressure [bar]</b>				
	-0.9 ... 1.5	10	13	72	1 ... 10	24	36	78			
	0.2 ... 1.6	10	13	73	1 ... 16	24	36	79			
	0.2 ... 2.5	10	13	75	2 ... 25	40	75	80			
	0 ... 4	12	26	76	4 ... 40	40	75	81			
0 ... 6	12	26	77								
<b>Sensor</b>	<b>Sensor material</b>	<b>Sensor housing material</b>	<b>Thread</b>	<b>Range</b>		<b>Sensor material</b>	<b>Sensor housing material</b>	<b>Thread</b>	<b>Range</b>		
	1.4435	Brass nickel plated	G1/4" female	72	850	1.4435	Brass nickel plated	G1/2" male	76, 77	854	
	1.4435	Brass nickel plated	G1/2" male	72	859	1.4435	Brass nickel plated	G1/4" female	78, 79	855	
	1.4435	Brass nickel plated	G1/4" female	73, 75	851	1.4435	Brass nickel plated	G1/2" male	78, 79	856	
	1.4435	Brass nickel plated	G1/2" male	73, 75	852	1.4435	Brass nickel plated	G1/4" female	80, 81	857	
	1.4435	Brass nickel plated	G1/4" female	76, 77	853	1.4435	Brass nickel plated	G1/2" male	80, 81	858	
	<b>Fixing</b>	Direct on sensor or housing									00
With mounting bracket										31	
<b>Accessories</b>	Housing stainless steel									06	
	Damping elements and snubber see data sheet H72258										

## Standard products (extra short lead time)

Product No.	Type Code	Pressure range [bar]	Over pressure max. [bar]	Switching differential [bar]	Diameter Y [mm]	Length X [mm]
EXP1.5	900 9172 850 00 0000 0000 02	-0.9 ... 1.5	10	0.2 (fixed)	45	56.5
EXP2.5	900 9175 851 00 0000 0000 02	0.2 ... 2.5	10	0.2 (fixed)	45	56.5
EXP6	900 9177 853 00 0000 0000 02	0 ... 6	12	0.4 (fixed)	33	47
EXP16	900 9179 855 00 0000 0000 02	1 ... 16	24	0.9 (fixed)	27	42.5

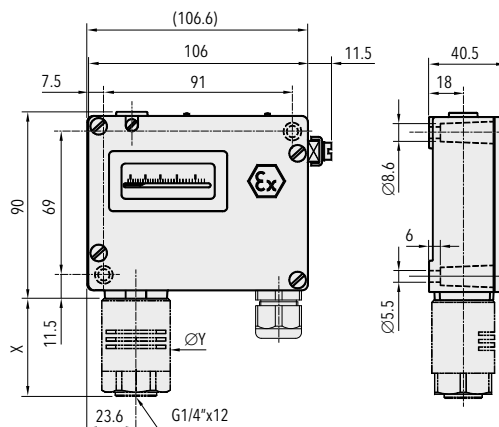


Specifications		
<b>Accuracy</b>	Repeatability	± 1.0 % FS typ.
	Scale accuracy typ.	± 2.0 % FS typ.
	Switching differential	See table
	Adjustment range switchpoint <sup>1)</sup>	10% ... 90% FS
<b>Environmental conditions</b>	Ambient temperature	-50°C ... +65°C
	Media temperature	-40°C ... +150°C
	Storage temperature	-50°C ... +65°C
	Protection	IP66 Accessory 06: IP66
	Humidity	Max.95 % relative
	Vibration	5...25 Hz: ±1.6 mm 25...100 Hz: 4g Ranges 72, 73, 75: 5...50 Hz: 20 mm/sec.
	Shock	50g/ 11ms
<b>Mechanical Data</b>	Sensor	See ordering information
	Housing	AlSi10Mg/ Epoxy coated Accessory 06: 1.4301 (AISI 304)
	Sealing	NBR
	Screwed cable gland	Polyamide
	Mounting torque	Max. 25 Nm
	Installation	any position
	Weight	~ 710 g
<b>Microswitch</b>	Rating	See table
	Resistance of insulation	> 2 MΩ
	Dielectric strength	1.5 kV
	Life time (mechanical)	1 Mio. cycles
<b>Electrical connection</b>	Electrical connections	Terminal screw
	Cable gland	M20x1.5/SW24 Cable-Ø 5.5-13 mm Approval: PTB 99 ATEX 3128 X
	Terminal screw	3 x 0.5...1.5 mm <sup>2</sup>


<sup>1)</sup> Other adjustment ranges upon request

Additional information		
<b>Documents</b>	Data sheet	/H72263
	Instructions	/H73171
	Flyer	/H70916


## Dimensions

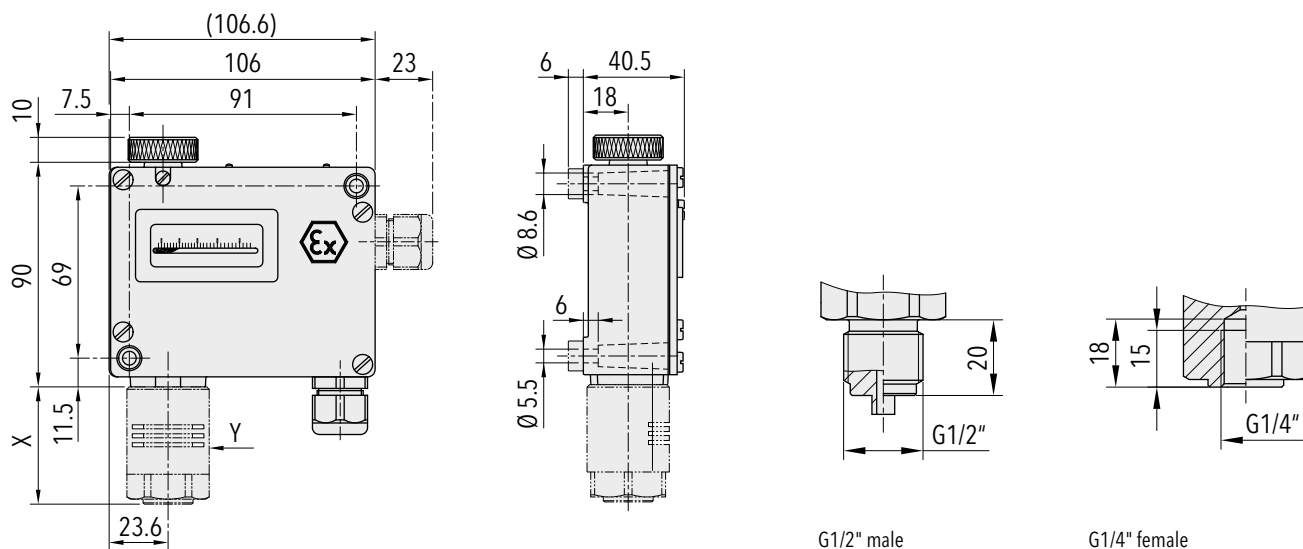


Dimension X and Y see data sheet H72271




900



912



904

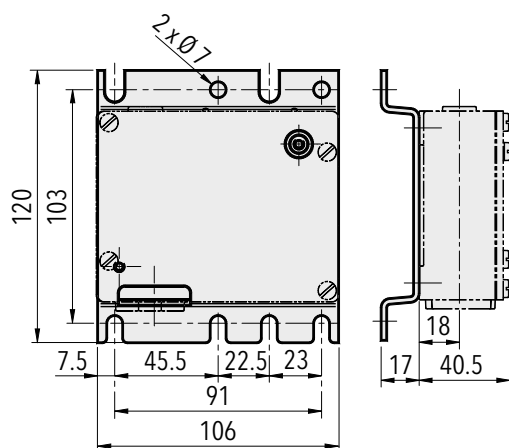


9XX.XXXX.XXX.31



Switching differential typ. @ 25°C					
<b>Measuring range of bellows sensor</b>	<b>[bar]</b>	-0.9 ... 1.5	0 ... 4	1 ... 10	2 ... 25
		0.2 ... 1.6	0 ... 6	1 ... 16	4 ... 40
		0.2 ... 2.5			
<b>Microswitch 91</b>	<b>[bar]</b>	0.2	0.4	0.9	2.0
Switching differential (not adjustable)					

Electrical data switch			
Type	Features	Rating	
		Resistive Load (Inductive Load)	
		AC	DC
<b>91</b>	Standard Ex	250V 5(5) A 125V 5(5) A	250 V 0.25 (0.03) A 125 V 0.5 (0.06) A 75 V 0.75 (0.25) A 50 V 1 (1) A 30 V 5 (3) A 15 V 5 (3) A

## Electrical connection



Switch 91

# EX PRESSOSTAT

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature.



## Applications

- Ex II 2G / D

## Features

- Rugged aluminium housing, option: housing stainless steel
- Protection IP66
- Any mounting position possible
- Ex db eb IIC T6 Gb
- Ex tb IIIC T80°C Db

Technical Data			
Measuring principle	Piston	Media temperature	NBR: -30°C ... +100°C FKM: -15°C ... +150°C
Measuring range	1 ... 10 to 60 ... 600 bar	Ambient temperature	-50°C ... +65°C
Output signal	1 Floating change-over contact (SPDT)	Approval / conformity	SEV 15 ATEX 0157 X IECEX SEV 17.0013X
Switching differential	Not adjustable	Type of protection	Areas with gas explosion hazards: II 2G Ex db eb IIC T6 Gb; Areas with dust explosion hazards: II 2D Ex tb IIIC T80°C Db
Repeatability	± 1.0 % FS typ.		


Subject to change

## Ordering information/type code

		XXX	XX	XX	XXX	XX	XX			
<b>Custom build code</b>	With display and adjusting screw	944								
	Without display, with adjusting screw	947								
	With display and adjusting knob	953								
<b>Microswitch</b>	Standard, switching differential not adjustable				91					
<b>Range</b>	<b>Range [bar]</b>	<b>Over pressure [bar]</b>	<b>Burst pressure [bar]</b>							
	1 ... 10	100	200				78			
	4 ... 40	200	400				81			
	6 ... 60	200	400				82			
	10 ... 100	200	400				83			
	16 ... 160	400	600				84			
	25 ... 250	400	600				85			
	40 ... 400	800	1000				86			
60 ... 600	800	1000				87				
<b>Sensor</b>	<b>Sensor material</b>	<b>Sensor housing material</b>	<b>Thread</b>	<b>Range</b>	<b>Sensor material</b>	<b>Sensor housing material</b>	<b>Thread</b>	<b>Range</b>		
	Piston 1.4435, O-Ring NBR	1.4435	G1/4" female	78	700	Piston 1.4435, O-Ring FKM	1.4435	G1/4" female	82, 83	709
	Piston 1.4435, O-Ring NBR	1.4435	G1/2" male	78	702	Piston 1.4435, O-Ring FKM	1.4435	G1/2" male	82, 83	711
	Piston 1.4435, O-Ring FKM	1.4435	G1/4" female	78	701	Piston 1.4435, O-Ring NBR	1.4435	G1/4" female	84, 85	712
	Piston 1.4435, O-Ring FKM	1.4435	G1/2" male	78	703	Piston 1.4435, O-Ring NBR	1.4435	G1/2" male	84, 85	714
	Piston 1.4435, O-Ring NBR	1.4435	G1/4" female	81	704	Piston 1.4435, O-Ring FKM	1.4435	G1/4" female	84, 85	713
	Piston 1.4435, O-Ring NBR	1.4435	G1/2" male	81	706	Piston 1.4435, O-Ring FKM	1.4435	G1/2" male	84, 85	715
	Piston 1.4435, O-Ring FKM	1.4435	G1/4" female	81	705	Piston 1.4435, O-Ring NBR	1.4435	G1/4" female	86, 87	722
	Piston 1.4435, O-Ring FKM	1.4435	G1/2" male	81	707	Piston 1.4435, O-Ring NBR	1.4435	G1/2" male	86, 87	724
	Piston 1.4435, O-Ring NBR	1.4435	G1/4" female	82, 83	708	Piston 1.4435, O-Ring FKM	1.4435	G1/4" female	86, 87	723
	Piston 1.4435, O-Ring NBR	1.4435	G1/2" male	82, 83	710	Piston 1.4435, O-Ring FKM	1.4435	G1/2" male	86, 87	725
	<b>Fixation</b>	Direct on sensor or housing								00
		With mounting bracket								31
	<b>Accessories</b>	Housing stainless steel								06
Damping elements and snubber see data sheet H72258										

Standard products (extra short lead time)

Product No.	Type Code	Pressure range [bar]	Over pressure max. [bar]	Switching differential [bar]	Diameter Y [mm]	Length X [mm]
EXPK10	944 9178 700 00 0000 0000 02	1 ... 10	100	0.4 ... 0.8 (fixed)	33	47
EXPK40	944 9181 704 00 0000 0000 02	4 ... 40	200	2 ... 5 (fixed)	27	42.5
EXPK100	944 9183 708 00 0000 0000 02	10 ... 100	200	4 ... 11 (fixed)	27	42.5
EXPK250	944 9185 712 00 0000 0000 02	25 ... 250	400	8 ... 26 (fixed)	27	42.5

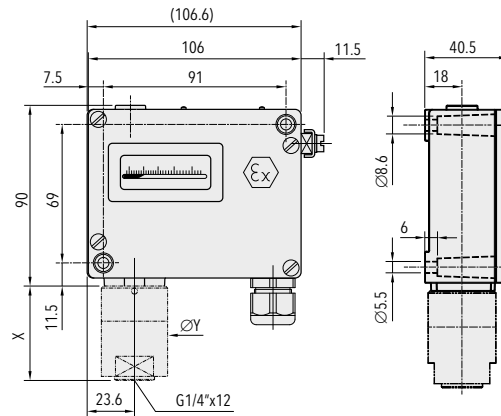


Specifications		
<b>Accuracy</b>	Repeatability	± 1.0 % FS typ.
	Scale accuracy typ.	± 2.0 % FS typ.
	Switching differential	See table
	Adjustment range switchpoint <sup>1)</sup>	10% ... 90% FS
<b>Environmental conditions</b>	Ambient temperature	-50°C ... +65°C
	Media temperature	NBR: -30°C ... +100°C FKM: -15°C ... +150°C
	Storage temperature	-50°C ... +65°C
	Protection	IP66 Accessory 06: IP66
	Humidity	Max. 95 % relative
	Vibration	5...25 Hz: ±1.6 mm 25...100 Hz: 4g
	Shock	50g/ 11ms
<b>Mechanical Data</b>	Sensor	See ordering information
	Housing	AlSi10Mg/ Epoxy coated Accessory 06: 1.4301 (AISI 304)
	Sealing	NBR / FKM
	Screwed cable gland	Polyamide
	Mounting torque	Max. 25 Nm
	Installation	any position
	Weight	~ 710 g
<b>Microswitch</b>	Rating	See table
	Resistance of insulation	> 2 MΩ
	Dielectric strength	1.5 kV
	Life time (mechanical)	1 Mio. cycles
<b>Electrical connection</b>	Electrical connections	Terminal screw
	Cable gland	M20x1.5/SW24 Cable-Ø 5.5...13 mm Approval: PTB 99 ATEX 3128 X
	Terminal screw	3 x 0.5...1.5 mm <sup>2</sup>


<sup>1)</sup> Other adjustment ranges upon request

Additional information		
<b>Documents</b>	Data sheet	/H72270
	Instructions	/H73171
	Flyer	/H70917

## Dimensions

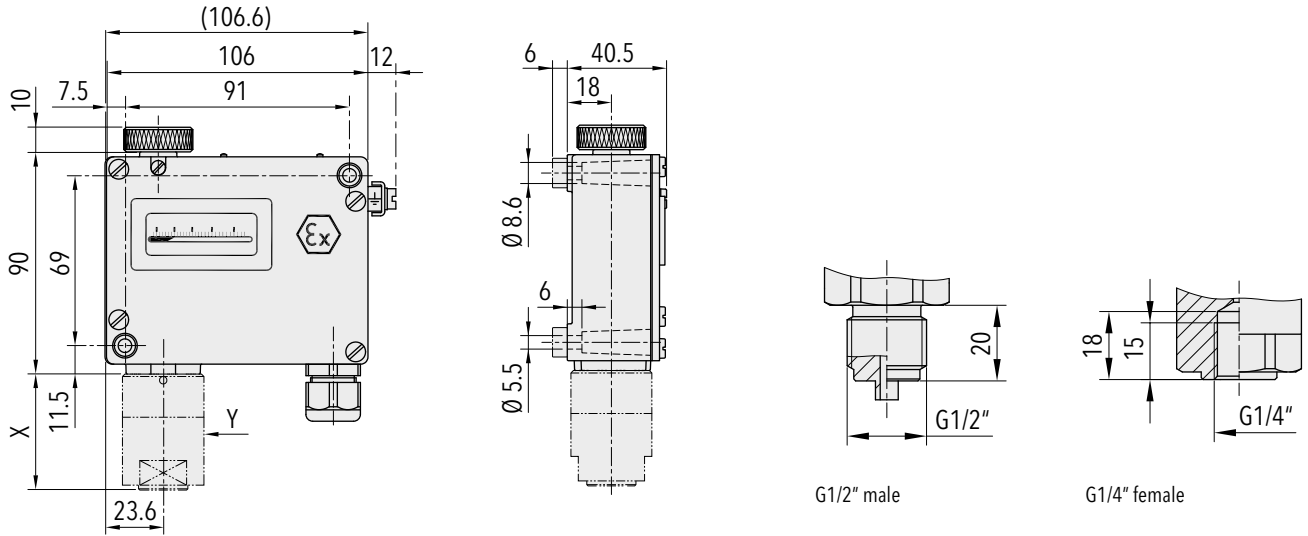


Dimension X and Y see data sheet H72271

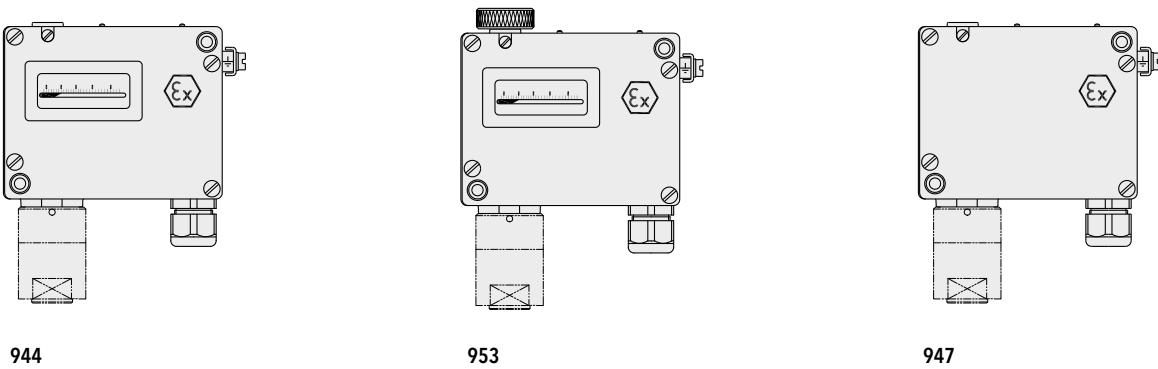

944

953

947

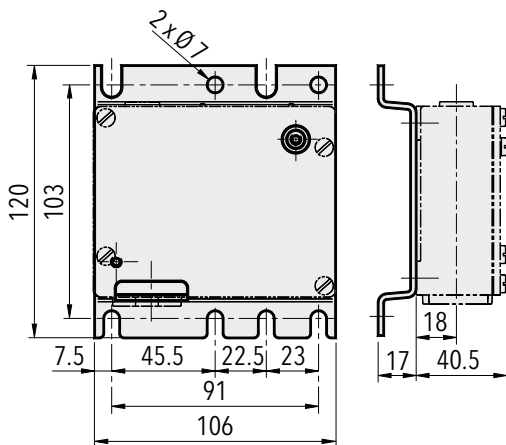

9XX.XXXX.XXX.31


## Switching differential typ. @ 25°C

<b>Measuring range of piston sensor</b>	<b>[bar]</b>	1 ... 10	4 ... 40	6 ... 60	10 ... 100
<b>Microswitch 91</b>	<b>[bar]</b>	0.4 ... 0.8	2 ... 5	3 ... 8	4 ... 11
Switching differential: Variable according to set point (not adjustable)					
<b>Measuring range of piston sensor</b>	<b>[bar]</b>	16 ... 160	25 ... 250	40 ... 400	60 ... 600
<b>Microswitch 91</b>	<b>[bar]</b>	6 ... 18	8 ... 26	14 ... 42	24 ... 65
Switching differential: Variable according to set point (not adjustable)					

## Electrical data switch

Type	Features	Rating	
		Resistive Load (Inductive Load)	
		AC	DC
91	Standard Ex	250V 5(5) A 125V 5(5) A	250 V 0.25 (0.03) A 125 V 0.5 (0.06) A 75 V 0.75 (0.25) A 50 V 1 (1) A 30 V 5 (3) A 15 V 5 (3) A

## Electrical connection



Switch 91

# EX DIFFERENTIAL PRESSOSTAT

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature.



## Applications

- Ex II 2G / D

## Features

- Rugged aluminium housing
- Protection IP66
- Ex db eb IIC T6 Gb
- Ex tb IIIC T80°C Db
- Any mounting position possible

Technical Data			
Measuring principle	Bellow	Repeatability	± 1.0 % FS typ.
Measuring range	-1 ... 6 to -1 ... 18 bar	Media temperature	-50°C ... +150°C
Differential pressure	-0.6 ... 3.4 to 1 ... 16 bar	Ambient temperature	-50°C ... +65°C
Output signal	1 Floating change-over contact (SPDT)	Approval / conformity	SEV 15 ATEX 0157 X IECEx SEV 17.0013X
Switching differential	Not adjustable	Type of protection	Areas with gas explosion hazards: II 2G Ex db eb IIC T6 Gb; Areas with dust explosion hazards: II 2D Ex tb IIIC T80°C Db

Subject to change



## Ordering information/type code

					XXX	XX	XX	XXX	XX	XX
<b>Custom build code</b>	With display and adjusting screw				920					
	Without display, with adjusting screw				924					
	With display and adjusting knob				932					
<b>Microswitch</b>	Standard, not adjustable								91	
<b>Range</b>	<b>Range [bar]</b>	<b>Differential pressure [bar]</b>	<b>Over pressure [bar]</b>	<b>Burst pressure [bar]</b>						
	-1 ... 6	-0.6 ... 3.4	12	26						74
	-1 ... 6	0 ... 4	12	26						76
	-1 ... 8	0 ... 6	12	26						77
	-1 ... 12	1 ... 10	24	36						78
-1 ... 18	1 ... 16	24	36						79	
<b>Sensor</b>	<b>Sensor material</b>	<b>Sensor housing material</b>	<b>Thread</b>	<b>Range</b>						
	1.4435	Brass nickel plated	G1/8" female	74						881
	1.4435	Brass nickel plated	G1/8" female	76, 77						883
	1.4435	Brass nickel plated	G1/8" female	78, 79						885
	Bronze	Brass	G1/8" female	74						942
	Bronze	Brass	G1/8" female	76, 77						943
	Bronze	Brass	G1/8" female	78, 79						944
	Bronze	Brass nickel plated	G1/8" female	74						992
	Bronze	Brass nickel plated	G1/8" female	76, 77						993
Bronze	Brass nickel plated	G1/8" female	78, 79						994	
<b>Fixing</b>	Direct on sensor or housing									00
	With mounting bracket									31
<b>Accessories</b>	Adapter G1/8" male - G1/2" male, brass									A6
	Adapter G1/8" male - G1/2" male, brass nickel plated									B6
	Adapter G1/8" male - G1/2" male, stainless steel 1.4435									D6
	Adapter G1/8" male - G1/4" female, brass									A5
	Adapter G1/8" male - G1/4" female, brass nickel plated									B5
	Adapter G1/8" male - G1/4" female, stainless steel 1.4435									D5
	Damping elements and snubber see data sheet H72258									


## Standard products (extra short lead time)

Product No.	Type Code	Pressure range [bar]	Differential pressure [bar]	Over pressure max. [bar]	Switching differential [bar]	Length X [mm]
EXPD3.4	920 9174 992 00 0000 0000 02	-1 ... +6	-0.6 ... +3.4	12	0.4 (fixed)	77
EXPD6	920 9177 993 00 0000 0000 02	-1 ... +8	0 ... 6	12	0.4 (fixed)	77
EXPD16	920 9179 994 00 0000 0000 02	-1 ... +18	1 ... 16	24	0.7 (fixed)	87


Specifications		
<b>Accuracy</b>	Repeatability	± 1.0 % FS typ.
	Scale accuracy typ.	± 2.0 % FS typ.
	Switching differential	See table
	Adjustment range switchpoint <sup>1)</sup>	10% ... 90% FS
<b>Environmental conditions</b>	Ambient temperature	-50°C ... +65°C
	Media temperature	-50°C ... +150°C
	Storage temperature	-50°C ... +65°C
	Protection	IP66
	Humidity	Max. 95 % relative
	Vibration	5...25 Hz: ±1.6 mm 25...100 Hz: 4g
	Shock	50g/ 11ms
<b>Mechanical Data</b>	Sensor	See ordering information
	Housing	AlSi10Mg/ Epoxy coated
	Sealing	NBR
	Screwed cable gland	Polyamide
	Mounting torque	Max. 25 Nm
	Installation	any position
	Weight	~ 610 g
<b>Microswitch</b>	Rating	See table
	Resistance of insulation	> 2 MΩ
	Dielectric strength	1.5 kV
	Life time (mechanical)	1 Mio. cycles
<b>Electrical connection</b>	Electrical connections	Terminal screw
	Cable gland	M20x1.5/SW24 Cable-Ø 5.5...13 mm Approval: PTB 99 ATEX 3128 X
	Terminal screw	3 x 0.5...1.5 mm <sup>2</sup>

<sup>1)</sup> Other adjustment ranges upon request


## Dimensions

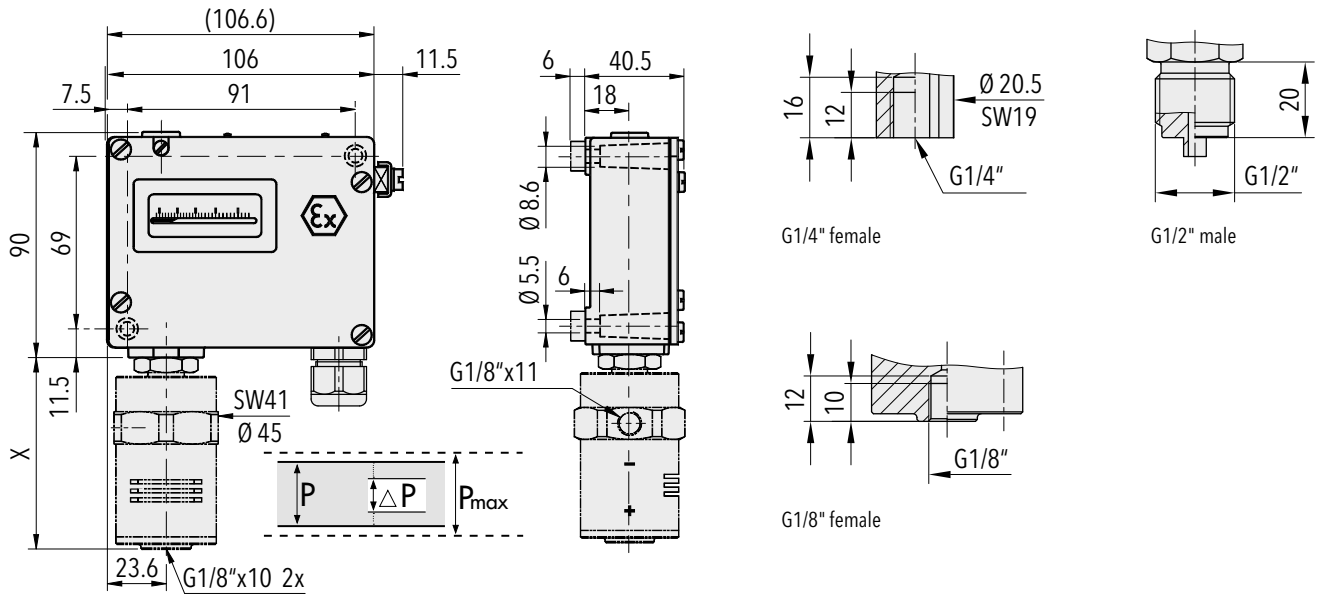


Dimension X see data sheet H72271

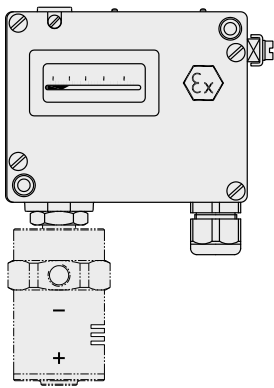


920

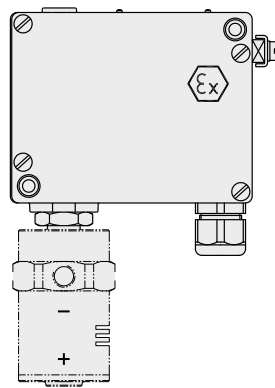


924

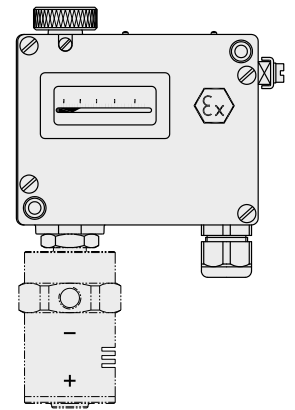


932

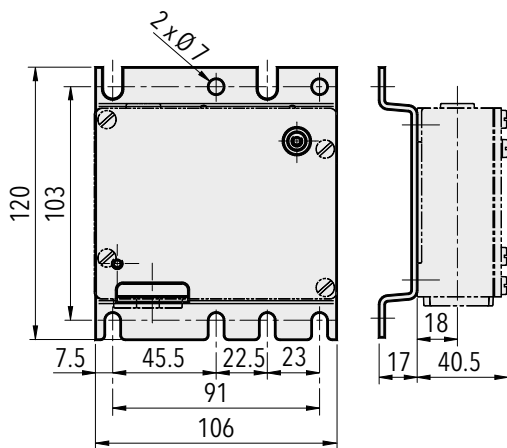

9XX.XX.XX.XXX.31.XX



A5/B5/D5



A6/B6/D6


## Switching differential typ. @ 25°C

<b>Measuring range of bellows sensor</b>	<b>[bar]</b>	-0.6 ... 3.4	1 ... 10
		0 ... 4	1 ... 16
		0 ... 6	
<b>Microswitch 91</b>	<b>[bar]</b>	0.4	0.9
Switching differential (not adjustable)			

## Electrical data switch

Type	Features	Rating	
		Resistive Load (Inductive Load)	
		AC	DC
91	Standard Ex	250V 5(5) A 125V 5(5) A	250 V 0.25 (0.03) A 125 V 0.5 (0.06) A 75 V 0.75 (0.25) A 50 V 1 (1) A 30 V 5 (3) A 15 V 5 (3) A

## Electrical connection



Switch 91

## Additional information

Documents		
	Data sheet	/H72256
	Instructions	/H73171
	Flyer	/H70922




## Accessories for electromechanical pressure switches

Trafag offers a wide range of original accessories which are ideally matched to our products. These include devices for monitoring or configuring transmitters such as hand pumps with precision pressure gauge or the Sensor Communicator, a handheld device which provides direct access to the calibration values of the transmitter in the Trafag ASIC. Trafag also offers a wide range of accessories that meet specific application requirements and make installation easier, such as diagnostic valve manifolds, snubbers and pressure peak damping elements. For thermostats various protective pipes are available.

### Accessories for electromechanical pressure switches

- DVB Diagnostic valve block
- Hand pump with precision manometer
- Switch amplifier
- Adapters with manometer pressure ports
- Snubber
- Mounting plate
- Screwed cable gland

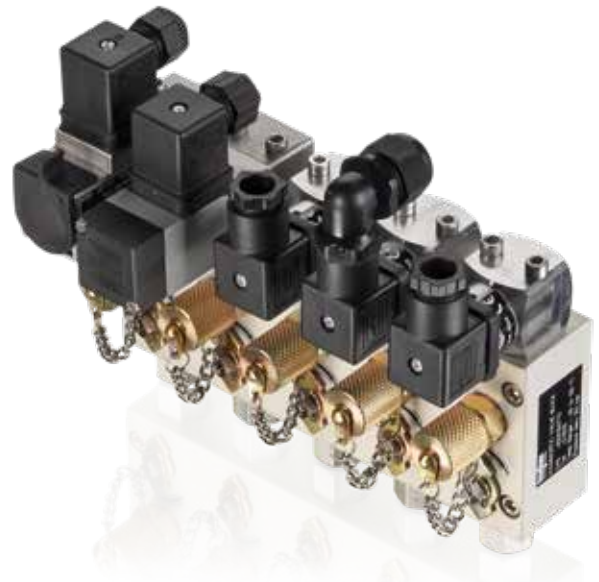

# DVB

## Diagnostic Valve Block

### Features

- Function tests during operation (no interruption necessary) with stop valve and test connection






### Technical Data

Pressure	-0.8 ... 100 bar
Ambient temperature	-20°C ... +120°C


<b>i</b> Data sheet	/H72361
Instruction	/H73361

### Standard products (extra short lead time)

Product No	Material	Product No	Material		
DVB11	1 P-in, 1 test connection, 1 P-out	Al, PEEK, FPM	DVB24	1 P-in, 4 test connection, 4 P-out	Al, PEEK, FPM
DVB12	2 P-in, 2 test connection, 2 P-out	Al, PEEK, FPM	DVB25	1 P-in, 5 test connection, 5 P-out	Al, PEEK, FPM
DVB13	3 P-in, 3 test connection, 3 P-out	Al, PEEK, FPM	DVB32	1 P-in, 1 test connection, 2 P-out	Al, PEEK, FPM
DVB14	4 P-in, 4 test connection, 4 P-out	Al, PEEK, FPM	DVB33	1 P-in, 1 test connection, 3 P-out	Al, PEEK, FPM
DVB15	5 P-in, 5 test connection, 5 P-out	Al, PEEK, FPM	DVB34	1 P-in, 1 test connection, 4 P-out	Al, PEEK, FPM
DVB22	1 P-in, 2 test connection, 2 P-out	Al, PEEK, FPM	DVB35	1 P-in, 1 test connection, 5 P-out	Al, PEEK, FPM
DVB23	1 P-in, 3 test connection, 3 P-out	Al, PEEK, FPM			

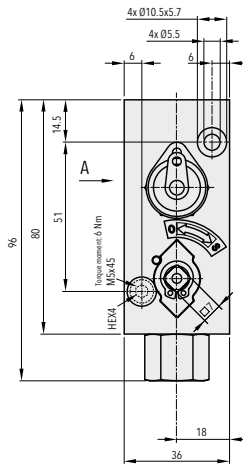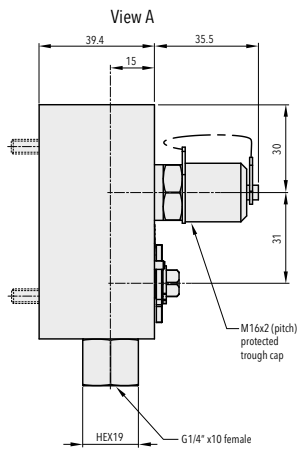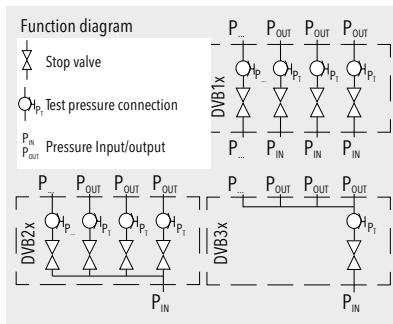

DVB11

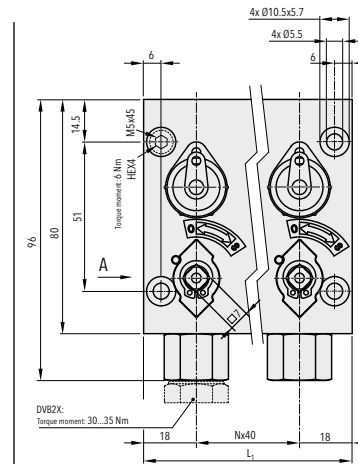

DVB X2... X5

# THP...

## Hand pump

### Features

- For testing of pressure transmitters and pressure switches



### Technical Data

Connection G1/4" female

### Standard products (extra short lead time)

Product No	Range [bar]	
THP30	-0.85 ... +25	
THP700	0 ... 700	Resolution 0.2 bar


# ZEN...

## Switch amplifier



### Features

- II 1 G Ex ia IIC Ga
- II 1 D Ex ia IIIC Da
- I M1 Ex ia I Ma
- IP 20
- Output: Signal, relays



### Technical Data

Ambient temperature -20°C ... +60°C

The switch amplifier transfers digital signals from the hazardous area. Sensors per DIN EN 60947-5-6 (NAMUR) and mechanical contacts may be used as alarms. The control circuit is monitored for lead breakage (LB).

### Standard products (extra short lead time)

Product No	Connection	
ZEN24VDC	20 ... 30 VDC, 20 ... 23 mA	$U_0 = 10.5 \text{ V}, I_0 = 13 \text{ mA}, P_0 = 34 \text{ mW}$
ZEN230VAC	207 ... 253 VAC, 45 ... 65 Hz	$U_0 = 10.6 \text{ V}, I_0 = 19.1 \text{ mA}, P_0 = 51 \text{ mW}$
ZEN28VDC	Max. 28 VDC	$U_0 = 28 \text{ V}, I_0 = 93 \text{ mA}, P_0 = 650 \text{ mW}$



## A.../D...

### Adapters with manometer pressure ports



#### Features

- Pressure adapters with different thread combinations and materials for individual applications

#### Technical Data


Material	1.4435 (AISI316L) / Brass
Connection	G1/4"m - G1/2"m, G1/4"m - G3/8"m, G1/4"f - G1/2"m



Data sheet /H72258

#### Standard products (extra short lead time)

Product No		Material
A1	G1/4" male - G3/8" male manometer	Brass
A2	G1/4" male - G1/2" male manometer	Brass
D1	G1/4" male - G3/8" male manometer	1.4435 (AISI316L)
D2	G1/4" male - G1/2" male manometer	1.4435 (AISI316L)
D4	G1/4" female - G1/2" male manometer	1.4435 (AISI316L)

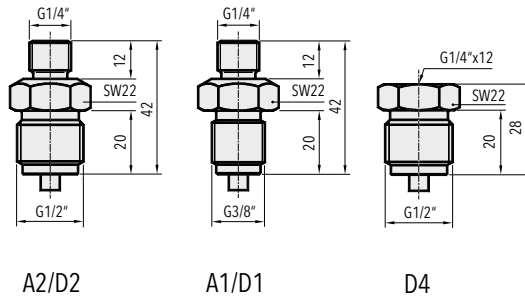

# K.../F...

## Snubber

### Features

- Integrated in an adapter
- K1/K2: Pressure peak damping element integrated in an adapter

K3/K4/K5  
F3/F4/F5



K1/K2

### Technical Data


Material	1.4435/316L, brass
Connection	G1/4" male - female, G1/8" male - female




Data sheet /H72258

### Standard products (extra short lead time)


Product No		Connection	Material
F3	Snubber for heavy oil	G1/4" male - female	Brass
F4	Snubber for light oil	G1/4" male - female	Brass
F5	Snubber for water/air	G1/4" male - female	Brass
K1	Snubber for water/air/light oil	G1/4" male - female	1.4435 (AISI316L)
K2	Snubber for water/air/light oil	G1/8" male - female	1.4435 (AISI316L)
K3	Snubber for heavy oil	G1/4" male - female	1.4435 (AISI316L)
K4	Snubber for light oil	G1/4" male - female	1.4435 (AISI316L)
K5	Snubber for water/air	G1/4" male - female	1.4435 (AISI316L)



K3/K4/K5  
F3/F4/F5



K1



K2

# MB31

## Mounting Plate


### Features

- For pressure transmitters and pressure switches



### Technical Data

Material	Steel galvanised
----------	------------------

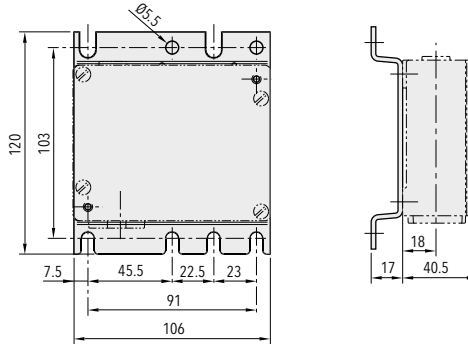

### Standard products (extra short lead time)

Product No.	Suitable for type	Material
MB31	N, ND, P, PS, PV, PD, PK, PVF, EXP, EXPK, EXPD	Steel galvanised

# CG

## Screwed cable gland

### Features

- DIN 8280 for shipbuilding
- Retrofit for pressure transmitters, pressure switches and thermostats




### Technical Data


Material	Brass
Connection	M18x1.5, M24x1.5
Cable	Ø 10.5 mm, 16.5 mm

### Standard products (extra short lead time)

Product No.	Material
CG18	M18x1.5 for 8 ... 10.5 mm cable diameter
CG24	M24x1.5 for 14 ... 16.5 mm cable diameter



CG18



CG24

# Terminology for pressure measurement instruments

## Relevant standards

DIN 16086, IEC 61298-2

### Instrument types

#### Pressure sensors

Membranes with elements applied whose physical properties change when the membranes deform (strain gauges with changing resistance, for example).

#### Pressure transmitters

Transmitters for converting the pressure to be measured into a defined or standardised analogue and/or digital output signal.

#### Pressure transducers

Pressure sensors that have a process connection and electrical connection (e.g. connector) but do not convert pressure into a standardised electrical signal like a pressure transmitter.

### Types of pressure measurement

#### Differential pressure measurement

The measurement of differential pressure of two different pressures. The measuring instrument has two pressure connections.

#### Absolute pressure measurement

The measuring result is always the deviation to the absolute zero (vacuum).


e.g. 4 mA = 0 bar (= vacuum); zero point (ZP): 0 bar

#### Relative pressure measurement DIN 16086: overpressure


The measuring result is always the deviation to the current, absolute atmospheric pressure.

e.g. 4 mA = 960 mbar (= atmospheric pressure); zero point (ZP): 0 bar

### Relative pressure measurement

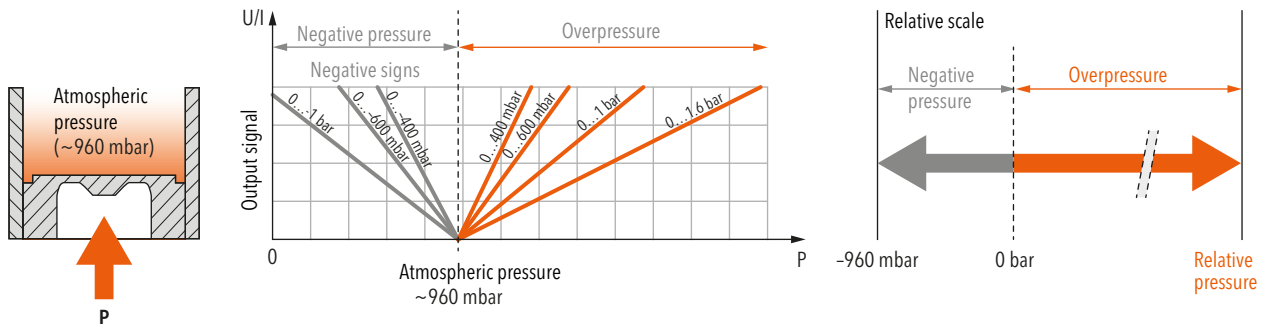

### Absolute pressure measurement

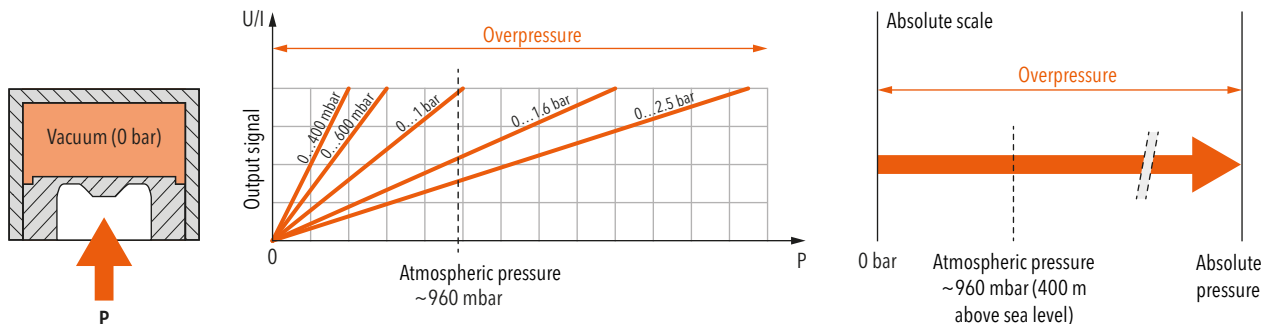

# Terminology for pressure measurement instruments

## Main features

### Nominal pressure measuring range

Range between the upper and lower limits of the size measured (operating pressure). The specified accuracy remains within this range.

### Measuring span

Algebraic difference between the upper and lower limit values of a certain measuring range.


### Overpressure Max. working pressure

Highest pressure specified by manufacturer for which the pressure transformer is designed at maximum temperature. The pressure transformer can be loaded up to this pressure without the guaranteed metrological properties having changed after going back into the measuring range. However, there is no longer a clear link between pressure and output signal in the range between nominal pressure and overpressure.

### Burst pressure

Pressure value (static) at which the measuring instrument suffers permanent damage. The instrument can withstand pressures up to this value without bursting and will not leak any measuring medium.

## Example

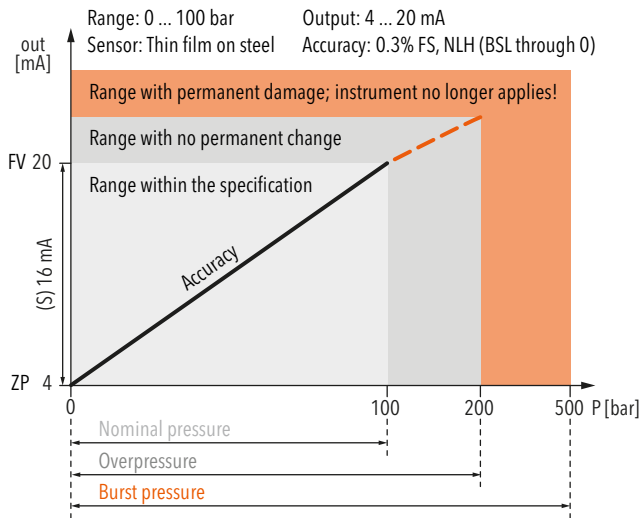

## Accuracy

### Typ. accuracy

(Typical) Mostly corresponds to the 1-sigma value of the normal distribution, i.e. approx. 68.3%. Generally, well over 75% of all Trafag instruments meet this typical measured value.


### Max. accuracy

(maximum) 100% of all instruments meet this maximum measured value.

### Non-linearity

The largest deviation from the effective characteristic line of an ideal reference line. The reference line can be defined as a limit point adjustment, a BSL or a BSL through 0.


### Specifications: Non-linearity, Hysteresis

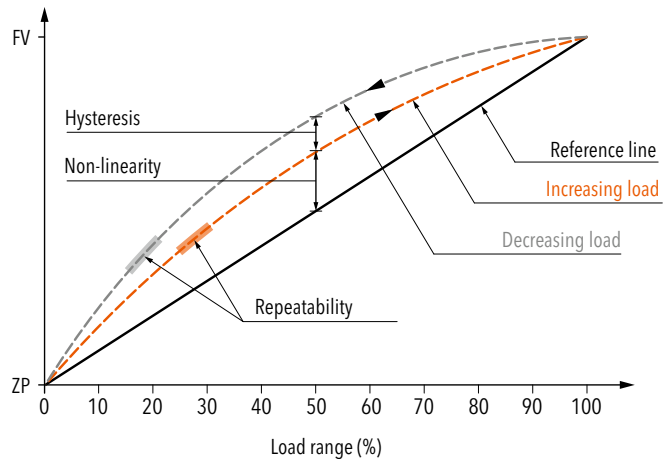

### BSL Best Straight Line

The reference line according to the BSL or the minimum value adjustment is placed in such a way that the maximum positive and negative deviations are as small as possible.

### Specifications: Accuracy NLH (BSL)

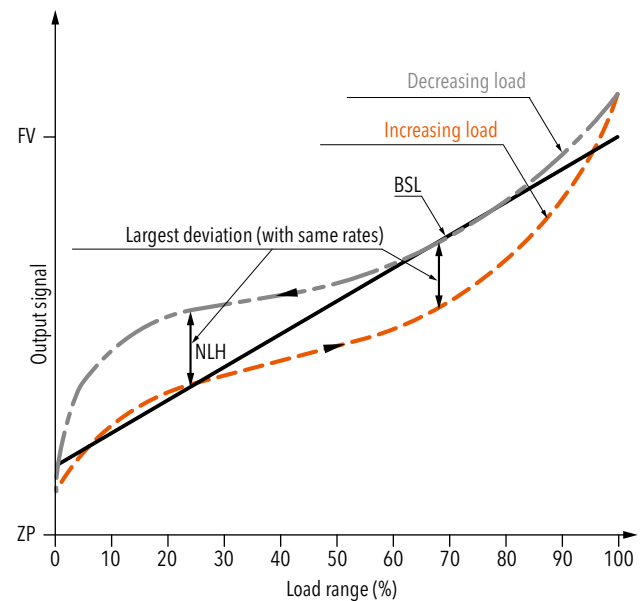


# Terminology for pressure measurement instruments

## BSL through zero

As an additional requirement for the minimum value adjustment, the BSL through zero (also BSL/0) must go straight through zero or the origin.

## Specifications: Accuracy NLH (BSL through zero)

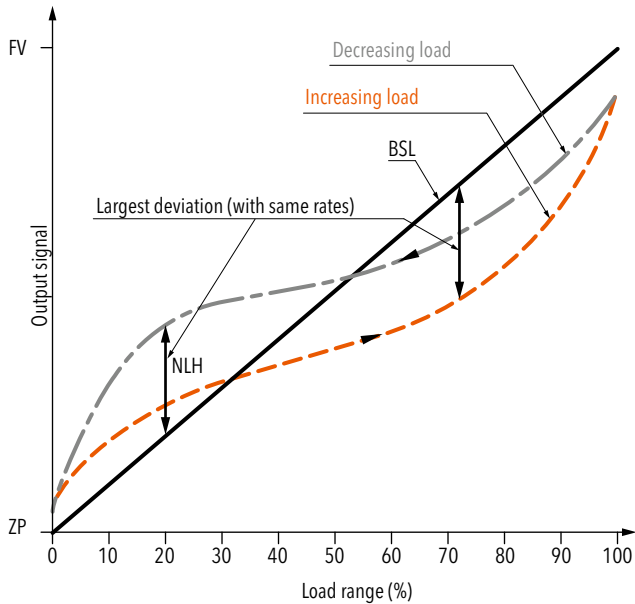

## Non-linearity according to limit point adjustment

The reference line runs through the origin and end point of the characteristic line. Non-linearity indicates the greatest deviations from this line.

## Hysteresis

Property of an instrument for yielding different output values in relation to its input values, which are dependent on the effective direction in which the input values are created (acc. to IEC 61298-2).

## Pressure hysteresis

The difference that occurs at the same pressure between measurements in the direction of increasing and then decreasing pressure.

## Temperature hysteresis

Maximum change of the zero point and output span for the pressure signal after specified temperature cycle over the operating temperature range.

## NLH non-linearity and hysteresis

Largest deviation from the ideal characteristic line (BSL, BSL/0 or limit point). In pressure measuring instruments, the non-linearity and pressure hysteresis are given together at a constant temperature.

## Accuracy DIN 16086: Measurement deviation

The accuracy denoted in the standard DIN 16086 with measurement deviation (at 25°C reference temperature) includes all deviations as a result of non-linearity, hysteresis, non-repeatability, zero point (start of measuring range) errors and span (end of measuring range) errors. Zero point errors and span errors also include the measuring uncertainty of the configuration ensemble.

## Repeatability DIN 16086: Non-repeatability

Deviation of the output signals with same input signals under identical (established) application conditions.

## Temperature coefficient TC

Change of measured value for zero point and span as a result of changes in temperature.

## Long-term stability Long-term drift

The change of accuracy due to aging under certain reference conditions during a certain period of time, typically 1 year.

## TEB Total error band

Total error (root from sum of the square of the deviations) due to measurement deviations (accuracy) and temperature influence (temperature coefficient TC). The temperature influence is usually given in the information from Trafag across a range larger than that given in the standard (-10 ... +60 °C). Whilst DIN 16086 also continues to add to the long-term stability over a year, the information from Trafag is subject to ex-works conditions for obvious reasons.

## Scale accuracy

For pressostats: Deviation arising from the manual switch point adjustment with the help of the display (scale).

## Electrical Data

### Output signal

Electrical signal that emits the value of the measurement size for further processing

### Rise time Step response

The time it takes for an output signal after a severe pressure change to increase from 10% to 90% of its final value that results from the change in pressure.

### Zero point ZP

Output signal in the pressureless state ( $P_{min}$ ), e.g. 4 mA at 0 bar ( $P_{min}$ ).

# Terminology for pressure measurement instruments

## Final value FV

Output value of the largest pressure value in the nominal pressure range ( $P_{max}$ ), e.g. 20 mA at 100 bar ( $P_{max}$ ).

## Span S

Final value (FV) - zero point (ZP) = span (S)  
e.g. span (S) = (FV) 20 mA - (ZP) 4 mA = 16 mA

## Switching differential Pressostats

Range within which the micro-switch in pressostats switches on and off

Example:

X...X = adjustable value

X - X = non-adjustable value; runs proportional to the nominal pressure

X = fixed value

## Limiter Pressostats

Pressostat with manual micro-switch reset.

## Environmental conditions

### Media temperature

Permissible temperature range of the measuring media.

### Operating temperature Ambient temperature

Temperature range in which the measuring instrument adheres to its specifications. As the electronics in certain instruments are more sensitive to temperature than the sensor element, the maximum ambient temperature for the instrument is lower than the permissible media temperature.

### Storage temperature

Temperature range in which the measuring instrument can be stored or transported without permanently changing the measuring characteristics.

### Protection

Humidity and dust shield according to IP classes in accordance with EN 60529.

## EMC Protection

### EMC Electromagnetic compatibility

Instrument property for functioning in an environment with electromagnetic interference and for not unduly influencing this environment (to which other equipment also belongs).

### Immission

Immunity to external electromagnetic disturbances.

### Emission

Interference emission from electromagnetic disturbances.

### Surge

Immunity to unipolar surge voltages that can occur due to surges as a result of switching operation and lighting.

### Burst

Immunity to recurring, rapid, transient electrical disturbances.

# Information about Ex products

Trafag draws from decades of experience in the design and manufacturing of pressure and temperature measuring instruments for hazardous area applications. We continuously meet the rising expectations in respect of safety and reliability of our products. These products provide reliable functionality in various hazardous zones with ATEX and in many cases also IECEx certification.

### CE - Designation and marking

**CE** 1258 **Ex** II 2 **GD**

Control No. of notified body for the supervision of the quality assurance system	I: Mining II: All other applications	Category (see below)	G = Gas D = Dust
--	---	----------------------	---------------------

- Category 1: Can be used in zone 0 (gas) and 20 (dust)
  - Potentially explosive atmosphere: Permanent
  - Two independent failures - safety
- Category 2: Can be used in zone 1 (gas) and 21 (dust)
  - Potentially explosive atmosphere: Regularly
  - One failure - safety
- Category 3: Can be used in zone 2 (gas) and 22 (dust)
  - Potentially explosive atmosphere: Unlikely or for very short time

### IEC/EN 60079-0 - Gases

**Ex ia IIC T6 Ga**

Type of protection	Equipment groups (for gases)	Temperature class	Equipment protection level
--------------------	------------------------------	-------------------	----------------------------

- Type of protection: Intrinsically safe
- Equipment group (gases): IIC = Hydrogen, Acetylene
- Temperature level: Defines ignition temperature and permissible temperature of equipment surface
- Protection level: Referring to installation zone (Ga = Zone 0 = Category 1 in ATEX)

### IEC/EN 60079-0 - Dust

**Ex ia IIIC T130°C Da**

Type of protection	Equipment groups (for dust)	Surface temperature	Equipment protection level
--------------------	-----------------------------	---------------------	----------------------------

- Type of protection: Intrinsically safe, powder filling, encapsulation, ...
- Equipment group (dust): IIIC = Conductive dust
- Temperature level: Defines maximum surface temperature
- Protection level: Referring to installation zone (Da = Zone 20 = Category 1 in ATEX)

### EN 50303 - Mining

**Ex ia I Ma**


Type of protection	Equipment for mining	Equipment protection level
--------------------	----------------------	----------------------------

- Category and Protection level:
  - Category M1 / Protection level Ma: Fully functional and safe when explosive atmosphere is present. Requires means to cope with two independent failures
  - Category M2 / Protection level Mb: These products are intended to be deenergised in the presence of an explosive atmosphere



## Simple Apparatus

Pressostats and Thermostats, when combined with a certified switch amplifier (Zener barrier/Zener relay), can be used as "simple electrical apparatus" in Zone 1 and 2, as well as in Zone 21 and 22, according to IEC/EN 60079-11. These pressostats and thermostats are not suitable for Zone 0 and Zone 20. The use in safety relevant applications (approved electrical apparatus) is not permitted. Switch amplifiers are suitable for intrinsically safe applications. The device transmits signals from the hazardous area into the safe area.

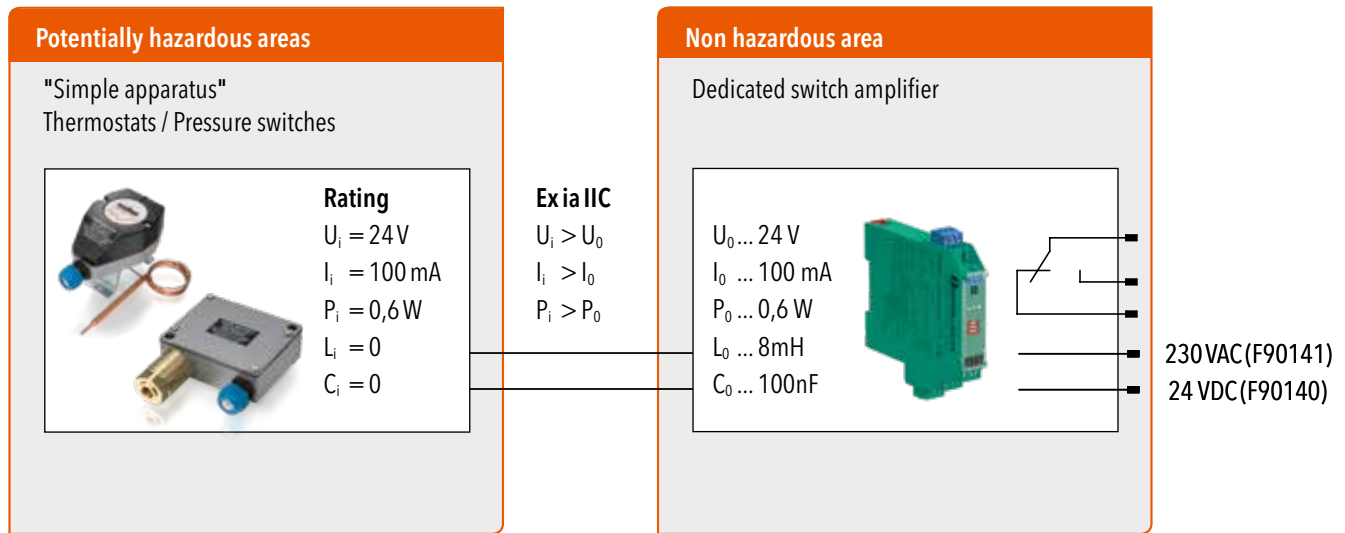

Recommended switch amplifier (see chapter „Accessories“):

Trafag parts no.: ZEN230VAC (230 VAC)

ZEN24VDC (24 VDC)

If another type of switch amplifier is used, make sure its electrical rating limits are within the specification of the „Simple Apparatus“ thermostat or pressostat.